

**EC270****Speedtender**
ADVANCED SEED DELIVERY

When The ESSENTIALS Are All You Need

J&M's new EC270 SpeedTender™ gives you all the essentials you need for a fast and efficient planting season. The 270 cubic feet capacity bulk tank utilizes separate dual compartments and manual doors to easily change from one seed variety to another. The low profile tank makes filling easier and transporting more stable, even over uneven terrain.

The 7" diameter unloading auger with poly-cup interior flighting is designed with an industry exclusive "bottom-less pit" design, reducing the cracking rate of seed to a minimum. A reliable, direct drive, 4.8 hp Honda electric start engine is conveniently located on the driver's side of the auger for easy operations and routine maintenance. A standard wired controller starts and stops the auger.

The sturdy under carriage frame is supported by two 7,000 lbs suspension axles with electric brakes and 235/85R16 tires. The A-Frame front hitch with 2 5/8" ball and safety chains is standard, while an optional gooseneck hitch is also available.

A patent pending Glide Right roll tarp design keeps the roll tube aligned, making it easier to open and close. The over tarp tension cable maintains a tight seal during windy over the road transport while also keeping your seed safe and dry during storage.

When the essentials are all you need, the EC270 SpeedTender delivers!


EFFICIENT & GENTLE POLY-CUPPED AUGER

Our poly-cupped auger system is designed to be gentle on your seed for minimum seed damage and maximum germination results.



STANDARD FEATURES:

- 270 Cubic Feet Capacity with dual compartments
- 7" Diameter Auger with Poly-Cup Plastic Flighting
- Industry Exclusive "Bottom-less Pit" Auger design significantly reduces seed breakage
- Manual Door Openers, Auger Swing and Height Positioning
- Patent Pending Glide Right Roll Tarp design for easy opening and closing
- Two 7,000 lbs suspension axles with 235/85R16 tires
- 4.8 HP Honda Electric Start Engine
- Front and Rear Auger Storage



OPTIONAL FEATURES:

- Gooseneck Hitch in place of standard A-Frame Hitch
- 3-Stage Telescoping Spout or 36" Rubber Spout
- Aluminum Wheels in place of standard wheels
- Licensing Package (includes license plate bracket and VIN number decal and Certificate of Origin)
- 5 Point Scale System
- Lundell Talc Applicator



ALUMINUM WHEEL OPTION



J&M Manufacturing Co, Inc

284 Railroad Street • Fort Recovery, Ohio 45846 • (419) 375-2376 • fax: (419) 375-2708 • sales@jm-inc.com

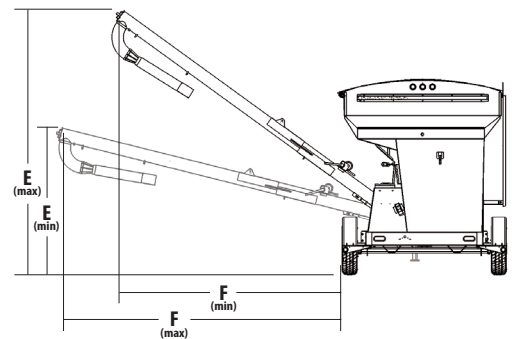
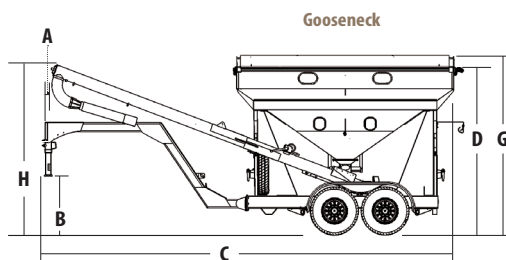
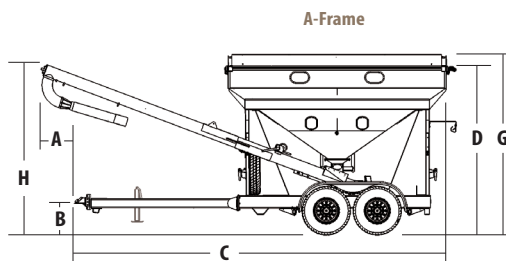
EC270**44' Maximum Side To Side Reach****22' Maximum Reach**

Specifications

	Capacity (total)	Weight (empty)	Tongue Wt. (loaded)	Auger	Unloading Rate	Auger Reach	Axles	Engine
EC270	270 Cubic Feet	4,400 lbs.	1,086 lbs.	19' Long 7" Diameter	16 Bushels/Min	44' (front to rear swing)	Two (2), 7,000 lb. Torsion-Flex Axles w/Electric Brakes	4.8 HP Honda Motor w/Electric Start

Dimensions

	EC270
A	2'-6" (A-Frame)
A	-0'-3" (Gooseneck)
B	1'-6" (min) (A-Frame)
B	2'-5" (min) (Gooseneck)
B	1'-10" (max) (A-Frame)
B	3'-1" (max) (Gooseneck)
C	20'-8" (A-Frame)
C	23'-3" (Gooseneck)
D	9'-4"
E	13'-0" (max)
E	7'-0" (min)
F	15'-0" (max)
F	12'-4" (min)
G	9'-10"
H	9'-5"


Speedtender
 ADVANCED SEED DELIVERY

J&M Manufacturing Co, Inc

284 Railroad Street • Fort Recovery, Ohio 45846 • (419) 375-2376 • fax: (419) 375-2708 • sales@jm-inc.com

08-30-2019