

PROVEN DESIGN & QUALITY  
**N-SERIES**



105 / 155 / 210





## SB & MB Booms

*Proven Design for reliability and longevity*

All booms for the N-Series are zinc-phosphate treated before being coated with polyester powder. This with a proven design ensures long and reliable use of the boom.



**SB Boom**



**MB Boom**



All booms have an adjustable spring loaded break-away to protect the boom in case of accidental encounter with an obstacle in the field.





## SB

The 20, 26 and 33 foot SB booms are directly mounted to the frame. The position of the boom can be altered to accommodate for various crop heights.

## MB

The 40 foot MB boom features a trapeze suspension for self-stabilization and prolonged boom life.

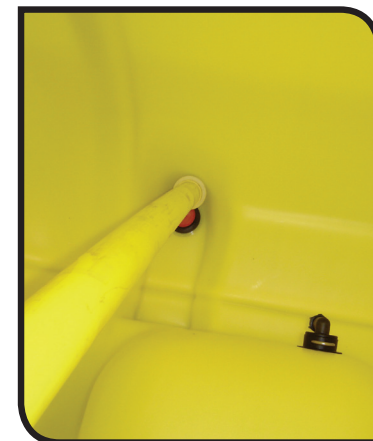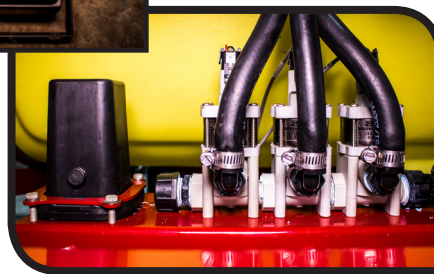

## Controls

HARDI manual (ET or BK) or electric (EC) controls: A long list of standard features which ensure accurate and reliable application of all plant protection chemicals. Spraymate rate controller also available with EC controls.



## Pump

HARDI Diaphragm pumps are designed for the application of crop protection products and liquid fertilizers. The principle of the HARDI diaphragm pump separates the liquid from vital parts of the crankshaft and bearings. This makes for years of dependable service.

Available with  
603 - 10GPM  
1203 - 20GPM  
1303 - 30GPM

## Tank

The high-impact polyethylene tank has a deep sump that ensures complete emptying of the tank. The tank design maximizes liquid agitation.



The single SNAP-FIT nozzle holders have a built-in non-drip diaphragm check valve. The non-drip valve ensures no dripping from the nozzles when the main on/off is closed. The SNAP-FIT system furthermore ensures that all nozzles are in the correct position. A large range of high quality HARDI nozzles is available to suit any spray task. Also available or optioned is the HARDI Triplet nozzle body.



## Boomless Option

Pasture Boom with 50 ft Spray width (1303 pump recommended).



## SPECIFICATIONS

Tank Size (gal)	Boom Width (ft)	Boom Model	Pump Model	Pump Capacity (gpm)	Dimensions (in) L x W x H	Weight (lbs)
105	14	SB	603/1203/1303	10/20/30	55x75x80	331
105	26	SB	603/1203/1303	10/20/30	55x75x83	334
155	14	SB	603/1203/1303	10/20/30	55x75x80	362
155	26	SB	603/1203/1303	10/20/30	55x75x83	375
155	33	SB	1203/1303	20/30	55x75x83	415
155	40	MB	1203/1303	20/30	59x82x87	520
210	14	SB	603/1203/1303	10/20/30	55x75x80	400
210	26	SB	603/1203/1303	20/30	55x75x83	419
210	33	SB	1203/1303	20/30	55x75x83	459
210	40	MB	1203/1303	20/30	59x82x87	576

## Optional Accessories



Spray Gun



Clean Water Dispenser



SMV Sign



2" Quick Fill



Inline Boom Filters



Davenport,  
USA



Nørre Alslev,  
Denmark



Lleida,  
Spain



Savigny,  
France



Beaurainville,  
France



Adelaide,  
Australia

# HARDI

## The Sprayer

### HARDI INTERNATIONAL A/S

is an international group whose basic idea is to satisfy the user's requirements for quality products which ensure efficient, punctual and precise application of crop protection products. Our world-wide distribution and sales network comprise more than 100 countries where we are represented by importers, agents and sales subsidiaries. These are situated in Sweden, Norway, Denmark, the UK, France, Spain, North America, Germany and Australia.

Since 1957 HARDI has committed to the ever-increasing demands for efficient and precise plant protection. HARDI is the trendsetter within application of crop protection products. To achieve this position continued developments and innovation are essential. HARDI is committed to the long term future of plant protection.

### Testing procedures

Sprayers leaving HARDI North America are tested according to the strictest quality standards.

The staff of the assembly line is accredited to match the demands from both NSTS (National Sprayer Testing Scheme), UK and JKI (Julius Kühn Institut), Germany. This ensures that the highest quality sprayers are delivered to farmers.



## HARDI NORTH AMERICA

1500 West 76th Street, Davenport, IA 52806  
E-mail: [info@hardi-us.com](mailto:info@hardi-us.com) · [www.hardi-us.com](http://www.hardi-us.com)  
Phone: (563) 386-1730 Fax: (563) 386-1280



#SprayHARDI