



2024 PRODUCT CATALOG





**PERFORMANCE
IS IN OUR ROOTS**

Over 20 years ago, Ferris set the bar as the first and only manufacturer to integrate suspension into the mowing experience. With auto racing in our DNA, we understood the positive impact suspension had on speed and control, so we applied it to our mowers. In fact, we first patented our suspension system with Todd Gordon, who went on to be a winning NASCAR crew chief. We revolutionized the commercial cutting landscape and continue to raise the bar with industry-leading suspension.

Our racing-inspired, automotive-style suspension and integrated cutting decks are engineered to deliver a quality cut faster, allowing you to earn profits and bragging rights. Our suspension is not just a feature or a marketing gimmick, it is a game changer that simply has to be experienced. Others have tried, but there's a difference you can feel only on a Ferris. True suspension changes everything.

EXPERIENCE SUSPENSION.




CONTENTS

WHY FERRIS®	04
ZERO TURNS	12
STAND-ONS	26
FRONT MOUNTS	32
WALK BEHINDS	34
COLLECTION SYSTEMS	40
ACCESSORIES & ATTACHMENTS	42
BLOWERS	44
SPREADER/SPRAYERS	52
SPECIFICATIONS	60

DIFFERENT BY DESIGN

Our ForeFront™ Suspension System is simply the industry's most advanced. It's the latest generation of Ferris suspension, utilizing automotive-style, independent front axles, coil-over shocks and innovative control arms. When you put it all together, you get a machine that protects and enhances both equipment and operator. Finally, you can finish your jobs faster, extend your mower's life span, and grow your turf care business.

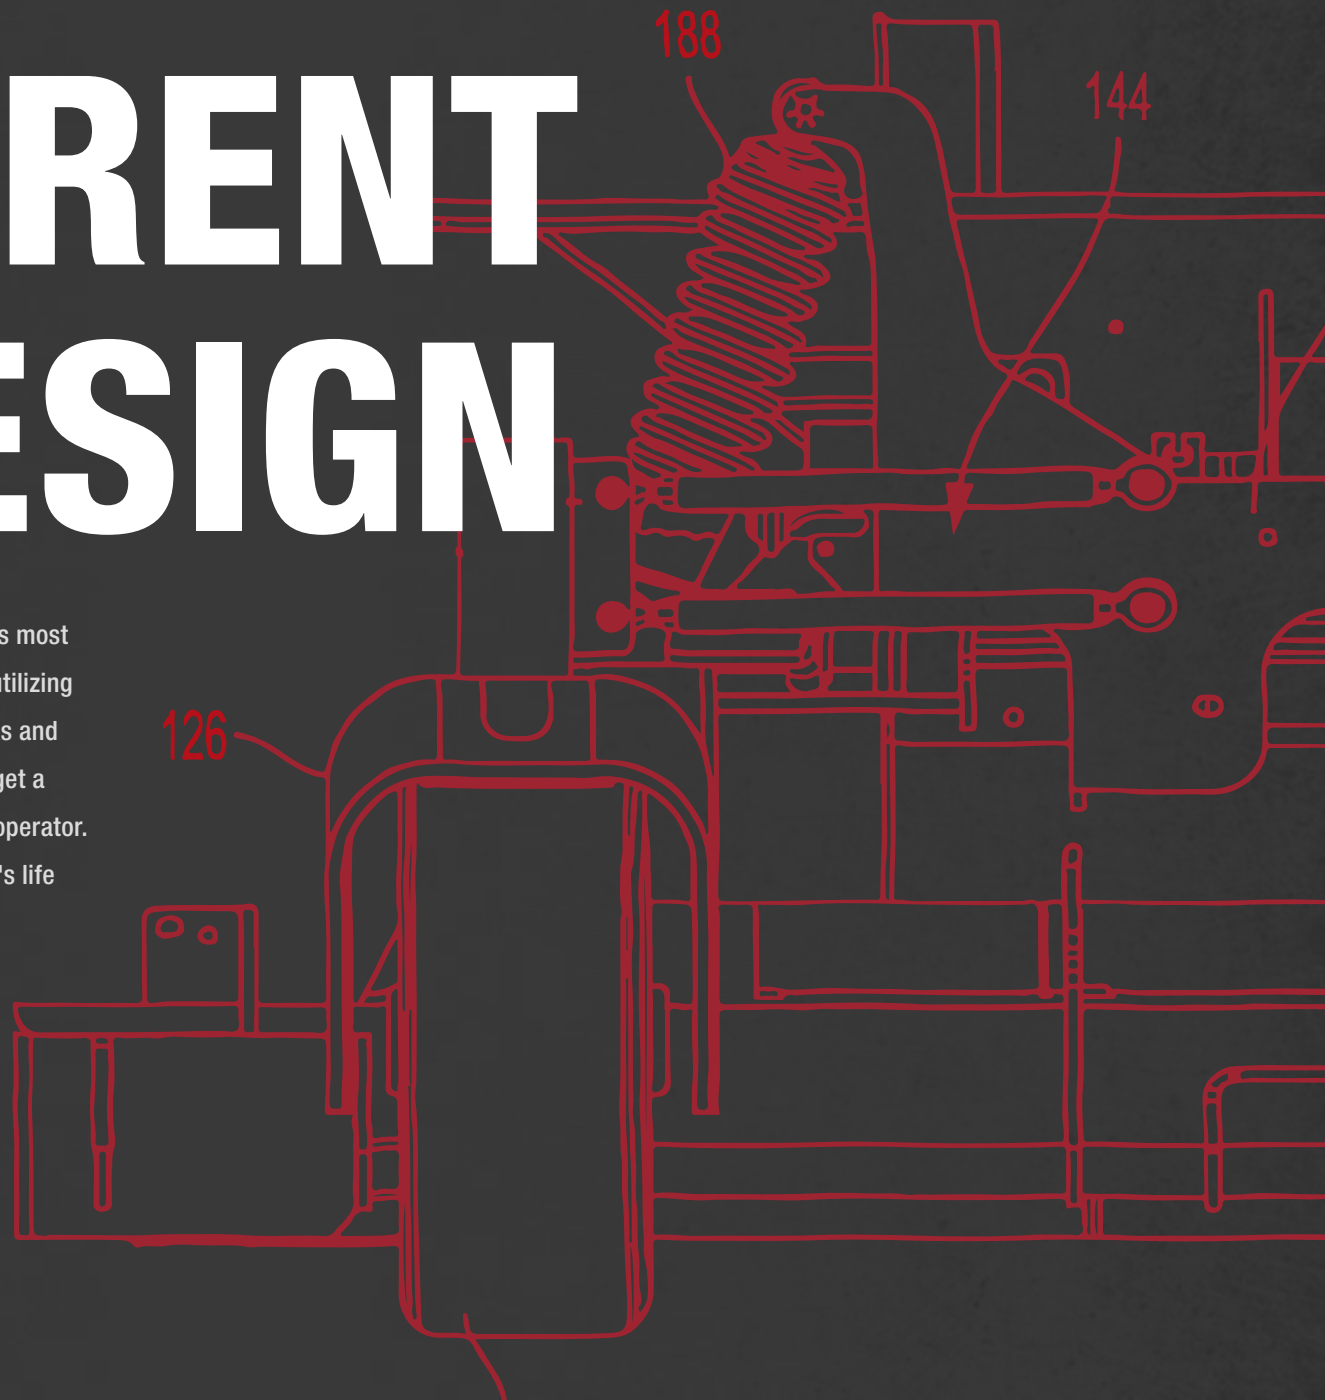

FOREFRONT™ SUSPENSION

MULTI-PATENTED, INDUSTRY-LEADING SUSPENSION TECHNOLOGY

INDEPENDENT FRONT AXLES

+

ISOLATED DECK

+

FOUR STEEL CONTROL ARMS

+

COIL-OVER SHOCKS



Automotive technology inspires our suspension, we suspect office chairs inspired others. Beginning with independent suspension, each side of the mower absorbs bumps and holes in the yard without scalping.



Our high-performance cutting deck has been engineered specifically to finish your most demanding jobs at higher speeds while maintaining a smooth, consistent, scalp-free cut. Go ahead, earn your bragging rights.



Four steel control rods help keep the caster wheel in an ideal vertical position - virtually eliminating caster wheel chatter. The result, a smooth ride and straight lines - even at maverick speeds. Fast never felt so good.



Coil-over shocks mounted to the axles manage the spring action and create a smooth ride. Each progressive spring is fully adjustable for different operators' weights. The best ride, sticks down.

iCDTM+ CUTTING SYSTEM

DELIVERING NEXT-LEVEL PERFORMANCE AND SUPERIOR RESULTS

The new and improved iCDTM+ Cutting System offers better durability, greater efficiency and increased quality of cut for Ferris 60" and 72" decks on our commercial mowers. Not only does our exclusive system ensure a smooth, consistent and scalp-free cut, it is engineered to take on, cut and disperse large amounts of grass at speed. Easily handle unforgiving terrain and get that picture-perfect cut every time. When you look back, you'll be glad you bought a Ferris.

iCDTM+ FEATURES

- ▶ **REINFORCED ROUNDED TRIM EDGE**
- ▶ **REDESIGNED BAFFLE**
- ▶ **INCREASED BLADE OVERLAP**
- ▶ **WIDER DISCHARGE OPENING**

NEW & IMPROVED

DECK DURABILITY


The flat nose design with a reinforced rounded trim edge resists cracks, deflects impact and provides durability in areas that may be more vulnerable. Plus, the anti-scalp wheel is bolted on, not welded - so it can be easily replaced when needed.

MOWING EFFICIENCY

A wider discharge opening reduces grass buildup that causes mowers to bog down while the redesigned baffle increases vacuum for better clipping ejection.

CUT QUALITY


Increased blade overlap and redesigned baffle create maximum vacuum, pulling the grass up, for a premium cut without stragglers.

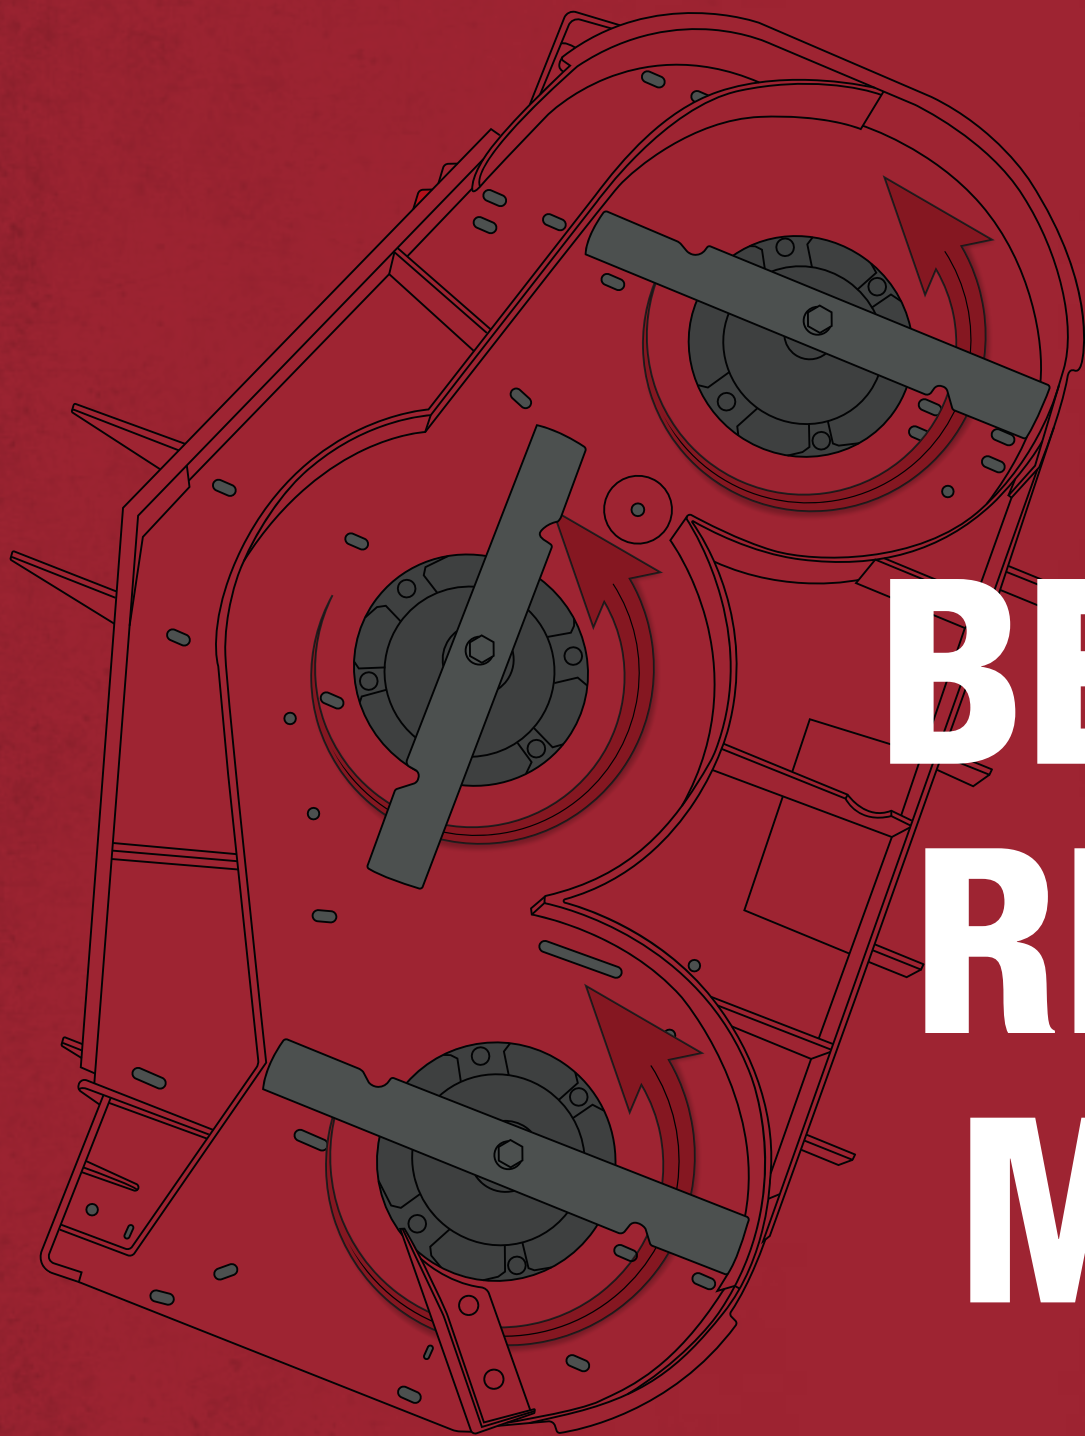

**BECAUSE
RESULTS
MATTER**

**EXPERIENCE
SUSPENSION,
ELECTRIFIED**



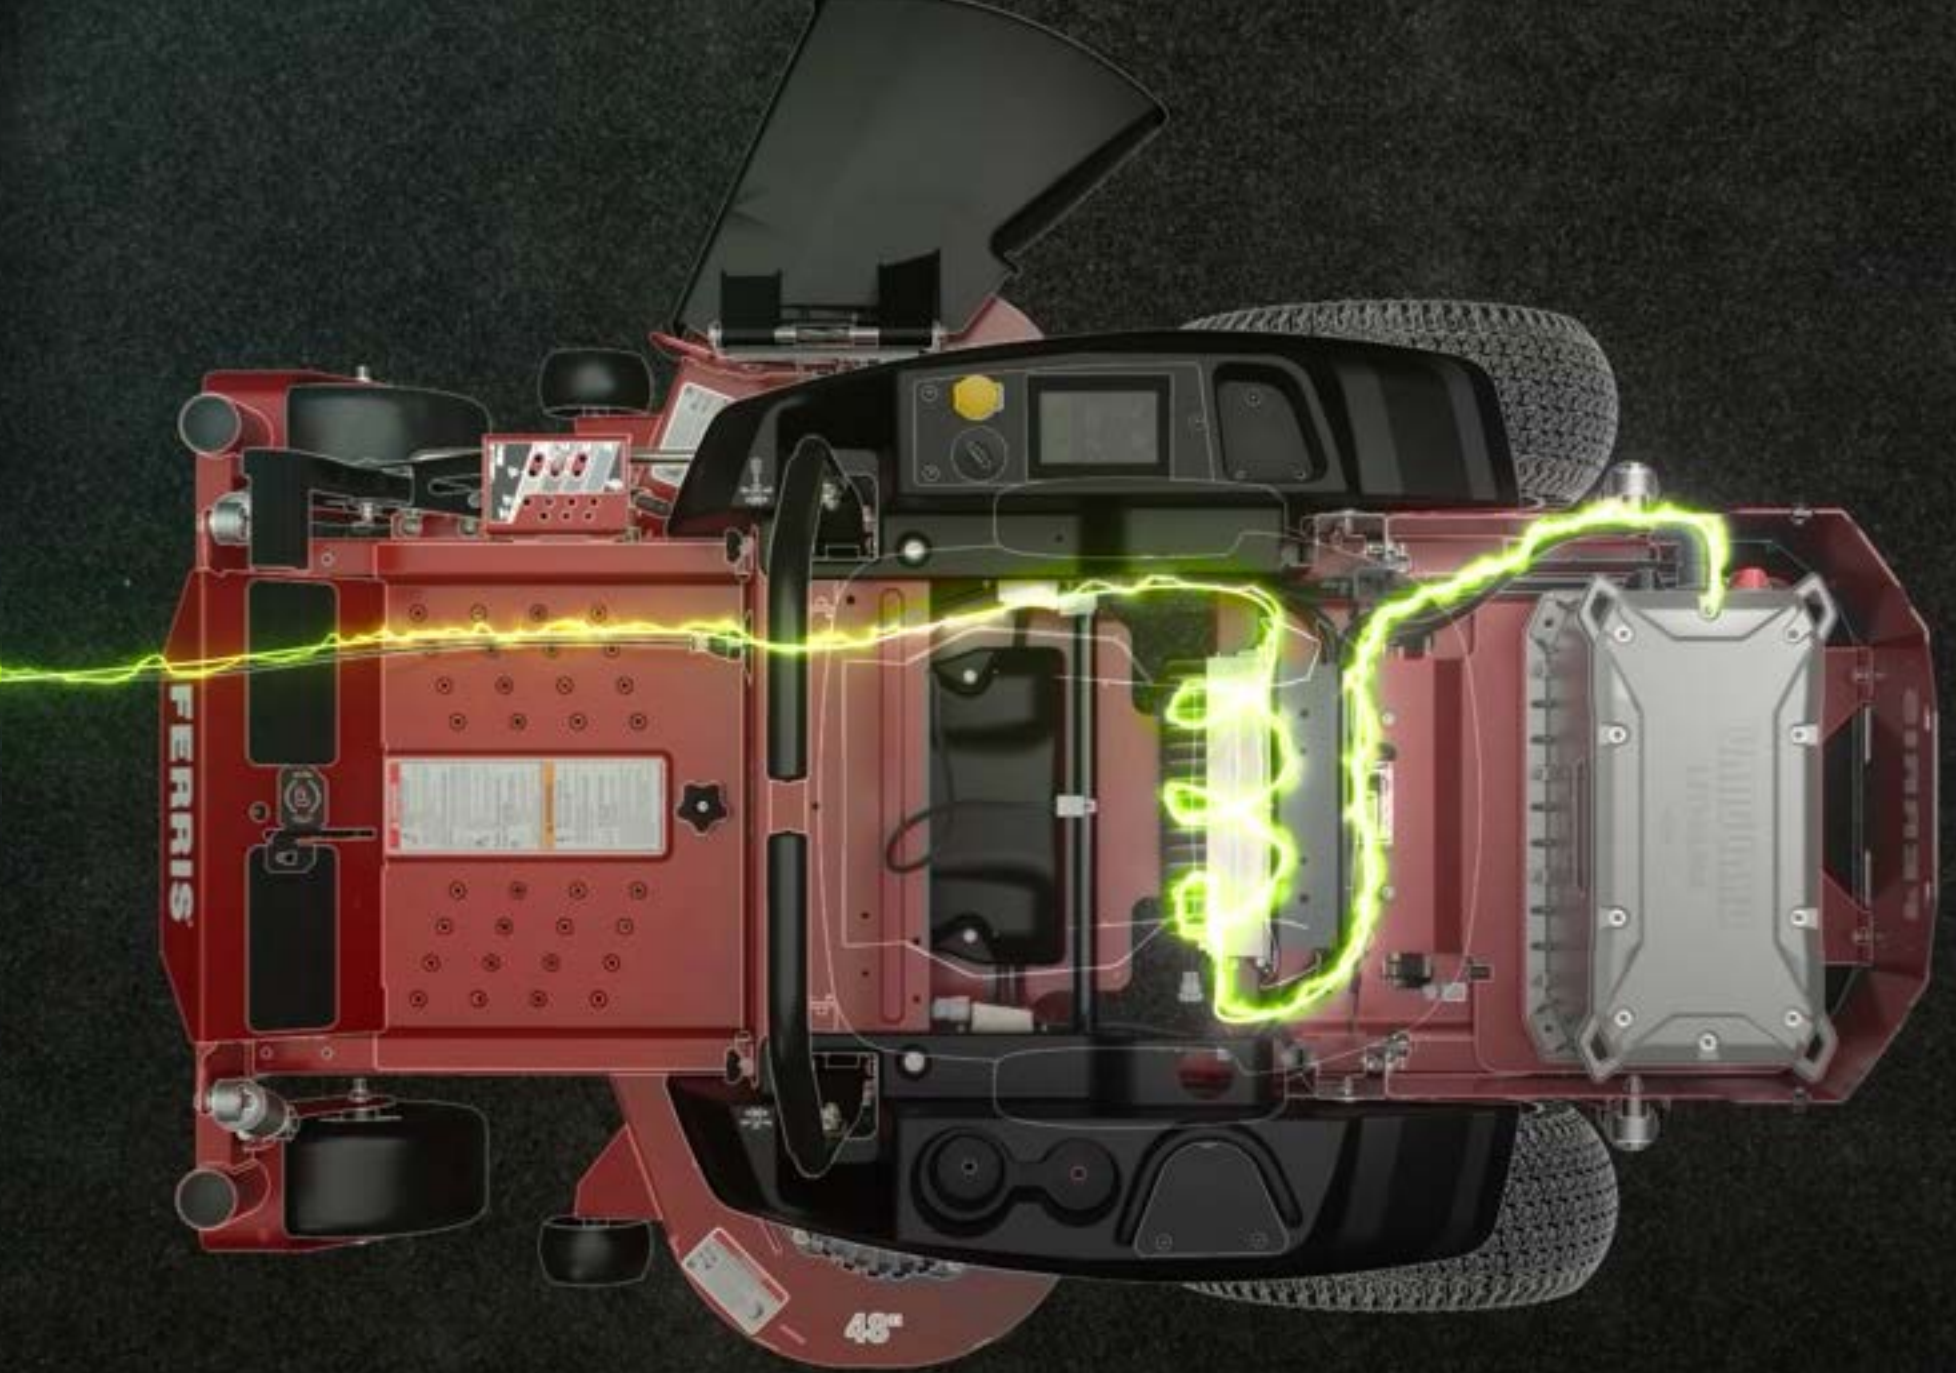

QUIET OPERATION. QUALITY CUT. QUICK CHARGE TIME.

QUIET OPERATION



Up to 90% quieter* than a similar gas-powered zero turn.

CHARGE & GO



Easily charge the 300e with a standard outdoor extension cord in a 110v outlet.

VANGUARD® BATTERY



Powered by a 48V 3.5kW Vanguard lithium-ion battery, with a run time of up to two hours or up to 3.5 acres.

FERRIS SUSPENSION



The only electric zero turn with full suspension for unmatched operator comfort and a premium cut.

ZERO OPERATING EMISSIONS



Complete elimination of harmful gases for reduced environmental impact.

LED TOUCHSCREEN



Dynamic and intuitive display with live information including run time and battery life, at your fingertips.

300e

The 300e is made for those with yard sizes up to 3.5 acres who also want the commercial-cutting Ferris edge. Its low-maintenance and quiet operation ensure a more enjoyable mowing experience. Not only is it eco-friendly, energy-efficient, and requires less maintenance than a gas mower, it features the same patented suspension that Ferris is known for.

MODEL	BATTERY	DECK
5902093	Vanguard® 48V/3.5kWh	42"
5902094	Vanguard® 48V/3.5kWh	48"

Available accessories:

Collection systems, mulch kit, LED light kit, trailer hitch kit



► **COMMERCIAL POWER**

Vanguard's commercial lithium-ion battery technology offers high energy density and longer-lasting power with multiple protective features and less maintenance than a gas mower

► **COMPACT MANEUVERABILITY**

The combination of a smaller frame and deck size options allows for easy maneuverability in tight spaces or around intricate landscaping

On-board charger

Charges with a standard outdoor extension cord (Type-B) in a 110v outlet, no need to install a separate charging station or swap heavy batteries

Brushless motor technology

Heavy duty die-cast housing with no-maintenance sealed bearings and an integrated motor controller for lower temperatures, improved efficiency and longer run times.

Low-lift blades

Designed to reduce noise and provide a cleaner, sharper cut

Fabricated mowing deck

Durable, 10-gauge steel-fabricated mowing decks provide reliable cutting performance and include anti-scalp wheels

ZERO



NEW 300e



F60



300S



500S



IS 600



IS 700

E SERIES

The E Series electric zero turn delivers a premium, commercially-inspired platform that's eco-friendly, energy-efficient and low-maintenance with low noise pollution and suspension for comfort.

3-YEAR CONSUMER | 90-DAY COMMERCIAL[†]

F SERIES

The F Series pairs essential commercial-grade components with a compact, sturdy frame to allow for easy maneuverability in tight spaces.

4-YEAR OR 500 HOURS LIMITED WARRANTY[†]

S SERIES

The S series delivers power in a compact size. Designed for smaller lot lines or maneuvering around intricate landscaping, with suspension for a smooth operation.

3-YEAR CONSUMER | 90-DAY COMMERCIAL[†]

IS[®] SERIES

End the day feeling good with the IS Series commercially-inspired mowers featuring patented suspension technology and powerful engine options. Whether you run a fleet or are an owner-operator there is a unique solution for you.

[†] See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

TURNS



ISX 800



ISX 2200



ISX 3300



IS 2600



IS 6200

ISX™ SERIES

Our leadership in suspension technology excels in the industry-leading ForeFront Suspension System. Delivering a premium, cushioned ride that drastically reduces shock to your body, as well as the mower, and enables you to mow faster and get done quicker than ever before. Be in control of your productivity and comfort, without sacrificing cut quality with the Ferris ISX Series.

DIESEL IS® SERIES

Step up to the diesel IS Series for exceptional performance in an industry-leading package. With powerful engine options from CAT® and Yanmar™ there is a reliable diesel solution to answer any challenge. Plus, while they pack a punch for performance, they don't sacrifice comfort with their patented 4-point suspension system, which delivers a comfortable, sustainable ride for less downtime.

2+2 YEAR LIMITED WARRANTY* + 5-YEAR LIMITED SUSPENSION WARRANTY* + 3-YEAR LIMITED BELT WARRANTY*

* See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

F60

Durability, affordability and power are packed into this compact zero turn that is loaded with commercial features and premium components. Designed to get you in and out of your jobs quickly and confidently, the F60 features a commercial-grade transmission, fabricated mower deck, fixed frame and reaches speeds of up to 7 mph.

MODEL	ENGINE OPTIONS	DECK
5901895	Kawasaki® FX600V (19 hp**/603cc)	36" Fabricated

Available accessories:

Mulch kit, trailer hitch kit, LED light kit, service jack



FABRICATED MOWER DECK

Two layers of 10-gauge steel are welded together to reinforce the top center portion of the cutter deck and a reinforced leading edge protects where the deck needs it most

HYDRO-GEAR® ZT-3100® TRANSAXLES

Dual-commercial transaxles with 7" cooling fans to repel debris

Accessibility

Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service

Easy maneuverability

The compact, small frame is lightweight and allows for easy mobility in tight spaces

Fixed frame seat

Rugged, fixed design provides operator comfort through a mid-back seat with cushioned arm rests

Rugged twin 4 gallon fuel tanks

Total fuel capacity of 8 gallons of unleaded gasoline

Ground speeds up to 7 mph

Cover more grass in less time for increased productivity

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

300S

Now in a compact footprint, the 300S delivers a premium, commercially-inspired platform that meets a more attractive price point never before seen with the Ferris brand. As expected with Ferris, the 300S provides suspension technology, serving up speed, cut quality, comfort, and durability.

MODEL	ENGINE OPTIONS	DECK
5902144	Briggs & Stratton® PXi Series™ (23 hp*/724 cc)	42"
5902143	Briggs & Stratton® PXi Series™ (23 hp*/724 cc)	48"
5902142	Briggs & Stratton® PXi Series™ (25 hp*/724 cc)	52"

Available accessories:

Collection systems, mulch kit, LED light kit



► **COMPACT MANEUVERABILITY**

The combination of a smaller frame and deck size options allows for easy maneuverability in tight spaces or around intricate landscaping

► **FEATURES WITHIN REACH**

You don't have to settle for less. This entry-level mower is loaded with commercially-inspired components, including the suspension we are known for, delivering a smooth ride and quality cut at faster speeds

Commercial-grade power

Powered by Briggs & Stratton® PXi Series™ OHV V-Twin, experience smooth power in various turf conditions

Fabricated mowing deck

Durable, steel-fabricated mowing decks provide reliable cutting performance and include anti-scalp wheels

Hydro-Gear® transaxles

Dual-commercial transaxles with 7" cooling fans repel debris and provide consistent power 42" & 48" decks: EZT®, 52" deck: ZT-2800®

Ground speeds up to 8 mph

The suspension and high-powered components deliver a high-speed mowing experience without sacrificing cut quality



500S

The 500S zero turn mower is packed with essential features to deliver reliable productivity and performance. The differentiating 4-point suspension saves your body from the pains of continuous mowing. Plus, the commercial-like performance and extras like the LED headlight make for a confident mowing experience season after season.

MODEL	ENGINE OPTIONS	DECK
5902101	Briggs & Stratton® CXi Series (25 hp*/724 cc)	48"
5902102	Briggs & Stratton® CXi Series (25 hp*/724 cc)	52"
5902056	Kawasaki® FR730V (24 hp**/726 cc)	61"
5902103	Briggs & Stratton® CXi Series (25 hp*/724 cc)	61"

Available accessories:

Collection systems, mulch kit, trailer hitch kit, service jack



▶ **PATENTED SUSPENSION**

Equipped with swing-arm rear and pivoting front coil-over shocks means less concern for uneven ground, and more focus on getting work done

▶ **COMMERCIAL-GRADE POWER**

Briggs & Stratton® CXi Series engines are built with the ultimate in dust and particle filtration, an advanced debris management system and a beefed-up cylinder block structure

Convenient components

Confidently mow day or dusk with the standard integrated LED headlight, premium mid-back seat, and improved engine protection

Fabricated mowing deck

The fabricated 10-gauge steel mowing deck is durable and provides reliable cutting performance in a variety of conditions

Hydro-Gear transaxles

Dual-commercial transaxles with 7" cooling fans repel debris and provide consistent power
48" deck: ZT-2800, 52" & 61 decks: ZT-3100®

Confident traction

22-inch rear-drive tires and large front casters ensure wheel contact for dependable traction in varying conditions

Ground speeds up to 8.5 mph

The suspension and high-powered components deliver a high-speed mowing experience without sacrificing cut quality

Foot-operated deck lift

An adjustable pedal changes cut height in 0.25" increments from 1.5" to 4.5"

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

IS 600

The IS 600 is a compact zero turn with the productivity and comfort features landscapers are looking for. Featuring our patented suspension technology, heavy-duty Hydro-Gear® ZT-3200™ drive system and speeds up to 10 mph, this mower can tackle tight spaces while providing maximum maneuverability and productivity.



MODEL	ENGINE OPTIONS	DECK
5901908	Kawasaki® FS600V (18.5 hp**/603 cc)	48"
5902110	Briggs & Stratton® CXi Series (25 hp*/724 cc)	48"
5901911	Kawasaki® FS691V (23 hp**/726 cc)	52"
5902109	Briggs & Stratton® CXi Series (25 hp*/724 cc)	52"

Available accessories:

Collection systems, mulch kit, trailer hitch kit, flat-free caster tires, LED light kit, service jack, professional striping kit, laser-edge blade sets, magnetic deck pin

COMMERCIAL-GRADE POWER

Briggs & Stratton CXi Series engines are built with the ultimate in dust and particle filtration, an advanced debris management system, and a beefed-up cylinder block structure

COMPREHENSIVE WARRANTY†

Coil-over shocks and all suspension-related components are covered for 5 years (60 months), unlimited hours

Patented suspension system

Pivoting front axle plus small shocks and medium rear shocks allow the wheels to follow the ground and improve comfort in a wide variety of conditions

Fabricated 10-gauge steel deck

Double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge

Hydro-Gear ZT-3200 transaxles

Dual-commercial transaxles with 7" cooling fans repel debris

Cast-aluminum spindles

Greaseable bearings provide a longer usable life

22" turf-friendly rear tires

Large rear tires provide increased traction and performance

Ground speeds up to 10 mph

Cover more grass in less time for increased productivity

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

IS 700

Mow more lawn in less time. The IS 700 Series, with up to five feet of cutting width, features our patented suspension technology, iCD™ Cutting System, heavy-duty Hydro-Gear ZT-3200 drive system and speeds up to 10 mph. This mower is full of features to improve the quality of cut and increase productivity and comfort.



MODEL	ENGINE OPTIONS	DECK
5902107	Briggs & Stratton® CXi Series (27 hp*/810 cc)	52" iCD
5902061	Briggs & Stratton® CXi Series (27 hp*/810 cc)	60" iCD

Available accessories:

Collection systems, mulch kit, trailer hitch kit, flat-free caster tires, LED light kit, service jack, professional striping kit, laser-edge blade sets, magnetic deck pin

PATENTED SUSPENSION SYSTEM

Pivoting front axle plus small shocks and medium rear shocks allow the wheels to follow the ground and improve comfort in a wide variety of conditions

STAND-OUT PERFORMANCE

The well-tuned steering system delivers smooth and confident operation for excellent performance time after time

iCD Cutting System

Specially engineered for the best quality cut and longer component life

Hydro-Gear ZT-3200 transaxles

Dual-commercial transaxles with 7" cooling fans to repel debris

Cast-aluminum spindles

Greaseable bearings provide a longer usable life

22" turf-friendly rear tires

Large rear tires provide increased traction and performance

Ground speeds up to 10 mph

Cover more grass in less time for increased productivity

Fuel capacity of 5.5 gallons of unleaded gasoline

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

ISX 800

The ISX 800 is engineered to increase efficiency and comfort. Combining next-generation Ferris technology, ForeFront Suspension with the iCD+ Cutting System, means a smoother ride and improved cut.

MODEL	ENGINE OPTIONS	DECK
5902083	Kawasaki® FT730V (24 hp**/726 cc)	52" iCD
5902084	Briggs & Stratton® CXi Series (27 hp*/810 cc)	52" iCD
5902073	Kawasaki® FT730V (24 hp**/726 cc)	60" iCD+
5902074	Kawasaki® FT730V-EFI (26 hp**/726 cc)	60" iCD+
5902075	Briggs & Stratton® CXi Series (27 hp*/810 cc)	60" iCD+
5902172	Briggs & Stratton® CXi Series EFI-ETC w/ Oil Xtend™ (27 hp*/810 cc)	60" iCD+

Available accessories:

Collection systems, mulch kit, trailer hitch kit, flat-free caster tires, LED light kit, service jack, professional striping kit, Kenda Terra Trac drive tires, laser-edge blade sets, fender kit



▶ FOREFRONT SUSPENSION SYSTEM

The patented system utilizes medium shocks with four upper and lower control rods that ensure the front caster bearing remains vertical through the full range of travel for an exceptionally smooth ride

▶ EFI-ETC ENGINE TECHNOLOGY & OIL XTEND

Select models feature the Briggs & Stratton CXi Series engine with EFI-ETC technology for easy starting and smooth performance and Oil Xtend to boost productivity and minimize downtime by 250 hours - 2.5 times longer than the industry standard

NEW USB Port

12V-60V, USB Type A & C located on the dash panel for easy access and charging

NEW iCD+ Cutting System

Redesigned to deliver next-level performance, increased durability and superior results

Integrated transmission

Commercial Hydro-Gear ZT-3400® transaxles, with 7" cooling fans, are designed for high performance and are fully serviceable

Ground speeds up to 10 mph

Cover more grass in less time for increased productivity

Cast-aluminum spindles

Greaseable bearings provide a longer usable life

23" turf-friendly rear tires

Fuel capacity of 5.5 gallons of unleaded gasoline

Product shown with optional accessories and may vary.

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

ISX 2200

Take productivity and comfort up a notch. The ISX 2200 boasts our most advanced suspension technology – ForeFront Suspension, ensuring operator comfort. The new iCD+ Cutting System delivers unrivaled cut quality and the heavy-duty Hydro-Gear ZT-4400™ transaxle drive system provides power and durability to get the job done.

MODEL	ENGINE OPTIONS	DECK
5902089	Kawasaki® FX801V (25.5** hp/852 cc)	52" iCD
5902090	Kawasaki® FT730V-EFI (26** hp/726 cc)	52" iCD
5902088	Vanguard® 810cc EFI with Oil Guard™ (28* hp/810 cc)	52" iCD
5902079	Kawasaki® FX801V (25.5** hp/852 cc)	60" iCD+
5902080	Kawasaki® FT730V-EFI (26** hp/726 cc)	60" iCD+
5902078	Vanguard® 810cc EFI with Oil Guard™ (28* hp/810 cc)	60" iCD+

Available accessories:

Collection systems, mulch kit, trailer hitch kit, flat-free caster tires, LED light kit, service jack, professional striping kit, Kenda Terra Trac drive tires (60"), laser-edge blade sets, fender kit, Kenda Turfsteel NPT



▶ FOREFRONT SUSPENSION SYSTEM

The patented system utilizes large shocks with four upper and lower control rods that ensure the front caster bearing remains vertical through the full range of travel for an exceptionally smooth ride

▶ PREMIUM SUSPENSION SEAT

Select models feature the premium high-back suspension seat with armrests, adjustable lumbar and back recline

NEW USB Port

12V-60V, USB Type A & C located on the dash panel for easy access and charging

NEW iCD+ Cutting System

Redesigned to deliver next-level performance, increased durability and superior results

Hydro-Gear ZT-4400 transaxles

Dual-commercial transaxles with 8.3" cooling fans to repel debris

Cast-iron spindles

8" diameter with greaseable bearings for improved durability in demanding conditions

Unleaded gas capacity of 11 gallons

Rugged twin 5.5 gal fuel tank for increased productivity

24" turf-friendly rear tires

Tapered bumper with built-in tie down points

Provides added engine protection and angled design provides more ground clearance

Product shown with optional accessories and may vary.

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.



**BECOME
UNSTOPPABLE.**

ISX 3300

Featuring ForeFront Suspension and extra large shocks, the ISX 3300 is the most productive gas-powered zero turn mower in our lineup. Select models are powered by the Vanguard® BIG BLOCK™ with EFI-ETC engine for fuel savings, easy starting and smooth, consistent productivity.

MODEL	ENGINE OPTIONS	DECK
5902066	Kawasaki® FX921V (31 hp*/999 cc)	60" iCD+
5902067	Vanguard® BIG BLOCK™ (36 hp*/993 cc)	60" iCD+
5902065	Kawasaki® FX1000V EFI (38.5 hp*/999 cc)	60" iCD+
5902064	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™ (40 hp*/993 cc)	60" iCD+
5902161	Vanguard® BIG BLOCK™ (36 hp*/993 cc)	72" iCD+
5902160	Kawasaki® FX1000V EFI (38.5 hp*/999 cc)	72" iCD+
5902145	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™ (40 hp*/993 cc)	72" iCD+

Available accessories:

Collection systems (60"), mulch kit, trailer hitch kit, flat-free caster tires, LED light kit, service jack, professional striping kit, Kenda Terra Trac drive tires, laser-edge blade sets, fender kit, Michelin Tweel tires



▶ FOREFRONT SUSPENSION SYSTEM

The patented system utilizes extra large shocks with four upper and lower control rods that ensure the front caster bearing remains vertical through the full range of travel for an exceptionally smooth ride

▶ VANGUARD BIG BLOCK EFI-ETC WITH OIL GUARD

The Vanguard BIG BLOCK EFI-ETC engine with Oil Guard features 40 hp* giving you added cutting performance to excel in thick, dense and wet grass (*select models*)

NEW USB Port

12V-60V, USB Type A & C located on the dash panel for easy access and charging

NEW iCD+ Cutting System

Redesigned to deliver next-level performance, increased durability and superior results

Vanguard electronic throttle control

This new technology allows the engine to harness all the power that is generated for more consistent blade tip speed (*select models*)

Hydro-Gear ZT-5400 Powertrain® transaxles

Dual-commercial transaxles with 9" cooling fans to repel debris

Hercules™ II spindles

Greaseable bearings and heavy-duty cast-iron construction

Ground speeds up to 12 mph

26" turf-friendly rear tires

Product shown with optional accessories and may vary.

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

IS 2600

The IS 2600 mower builds on the Ferris zero turn legacy, offering diesel power with premium features and enhanced productivity. Featuring our iCD Cutting System, long-life greaseable cast-iron spindles and the patented suspension Ferris is known for, this machine truly performs under the rigors of professional landscaping.

MODEL	ENGINE OPTIONS	DECK
5901929	Yanmar™ Diesel (24 hp/904 cc)	61" iCD

Available accessories:

Mulch kit, trailer hitch kit, flat-free caster tires, LED light kit, deluxe high-back suspension seat, service jack, professional striping kit, Kenda Terra Trac drive tires, laser-edge blade sets



▶ **EFFICIENT DIESEL POWER**

Efficient Yanmar™ 3-cylinder diesel engine provides lasting power in the most demanding of conditions

▶ **PATENTED SUSPENSION SYSTEM**

Consists of adjustable rear coil-over shocks and independent adjustable front coil-over shocks

iCD Cutting System

Specially engineered for the best quality cut and longer component life

Hydro-Gear ZT-4400™ transaxles

Dual-commercial transaxles with 8.3" cooling fans to repel debris

Cast-iron spindles

8" diameter with greaseable bearings for improved durability in demanding conditions

24" turf-friendly rear tires

Commercial-grade performance optimizes stability and traction

Ground speeds up to 10 mph

Cover more grass in less time for increased productivity

Diesel fuel capacity of 11 gallons

Twin rugged 5.5-gallon fuel tanks for less downtime to fill up

IS 6200

Big jobs need a big mower and the IS 6200 was purpose-built to tackle challenges with power and efficiency. The 48 hp[^] CAT[®] turbo diesel engine provides dominating power, and the suspension system ensures operator comfort. A 72" cutting width and speeds up to 12 mph allow crews to handle municipal and industrial properties easily.



MODEL

5902162

ENGINE OPTIONS

CAT[®] Turbo Diesel (48 hp[^]/1700 cc)

DECK

72" iCD+

Available accessories:

Mulch kit, flat-free caster tires, service jack, professional striping kit, Kenda Terra Trac drive tires, laser-edge blade sets



▶ CAT TURBO DIESEL ENGINE

Delivering a top speed of 12 mph, this market-separating engine has a life expectancy double that of gas engines between 4,000 and 5,000 hours and is rated at 48[^] hp (the highest for a zero turn mower in this class)

▶ DIGITAL MONITORING DISPLAY

Interactive onboard display maintains and monitors the performance and operation of the mower for peak performance

NEW USB Port

12V-60V, USB Type A & C located on the dash panel for easy access and charging

NEW iCD+ Cutting System

Redesigned to deliver next-level performance, increased durability and superior results

Independent suspension system

Utilizes rear swing arms and front control arms with large adjustable coil-over shocks to minimize caster chatter and deliver a smooth ride

Hydraulic deck lift

Foot activated hydraulic deck lift system for easy lifting and lowering

Heavy-duty clutch & gear box

A hand-operated 450 ft lb Warner Electric clutch and a right-angled Curtis[®] gearbox with dual 1" shafts harness more horsepower

Durable Hercules II spindles

Built to last Hercules II cast-iron spindles for sustainable productivity

Product shown with optional accessories and may vary.

[^] Power is rated for 48 gross horsepower at 2800 rpm as rated by CAT.

▶ “ The smoothest and most efficient mower I have owned in my 17 years in the lawn care industry! ”

- Maverick Lawn Care, MN

STAND



SRS Z1



SRS Z2



SRS Z3X

SRS™ SERIES

Expanding on our zero turn lineup of commercial lawn mowers, the Soft Ride Stand-on (SRS™) Series of stand-on mowers delivers the kind of heightened productivity that has become synonymous with the Ferris brand, in a stand-on machine. Precision-engineered for superior maneuverability and balanced stability and traction, the ergonomically designed SRS Z1, Z2, and Z3X mowers are loaded with innovative features that live up to Ferris' unwavering commitment to helping you work faster, take on more jobs, and finish the day feeling good.

2+2 YEAR LIMITED WARRANTY[†] + 5-YEAR LIMITED SUSPENSION WARRANTY[†] + 3-YEAR LIMITED BELT WARRANTY[†]

ONS



SRS Z1

Ideal for tight gates and smaller trailers the SRS Z1 offers excellent productivity in a compact frame. True to the Soft Ride Stand-on (SRS) series, the adjustable operator platform on the Z1 features suspension technology, improving operator comfort and performance.

MODEL	ENGINE OPTIONS	DECK
5901939	Kawasaki® FX600V (19 hp**/603 cc)	36"
5901941	Vanguard® (23 hp*/627 cc)	36"
5901940	Kawasaki® FX691V (22 hp**/726 cc)	48" iCD
5901942	Vanguard® (23 hp*/627 cc)	48" iCD

Available accessories:

Mulch kit, metal grass catcher, LED light kit, service jack, professional striping kit (48"), Kenda Terra Trac drive tires (48"), laser-edge blade sets (48")



► SUSPENSION PLATFORM SYSTEM

The operator platform is suspended by a coil-over shock with five adjustable positions, optimizing operator comfort and increasing productivity

► SPEED CONTROL SETTING

The easy locking 3-position speed control setting is conveniently located and requires no tools to facilitate smooth operation in a wide range of conditions

Fabricated 10-gauge steel deck

Double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge

Hydro-Gear ZT-3400 transaxles

Dual-commercial transaxles with 7" cooling fans with a 3-year limited warranty†

Cast-aluminum spindles

Greaseable bearings provide a longer usable life

23" turf-friendly rear tires

Commercial-grade performance optimizes stability and traction

Ground speeds up to 8 mph

Cover more grass in less time for increased productivity

6 gallon fuel capacity

Fuel tank is centrally located for improved stability and ease of fill-ups

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

SRS Z2

The SRS Z2 features our adjustable operator platform with suspension technology that optimizes operator comfort and increases productivity without sacrificing quality of cut. The superior balance on the Z2 provides excellent stability and maneuverability that exceeds expectations for traction and handling.



MODEL	ENGINE OPTIONS	DECK
5902050	Kawasaki® FT730V (24 hp**/726 cc)	52" iCD
5901947	Kawasaki® FX801V (25.5 hp**/852 cc)	52" iCD
5901948	Vanguard® 810 EFI with Oil Guard™ (28 hp*/810 cc)	52" iCD
5902070	Vanguard® 810 EFI with Oil Guard™ (28 hp*/810 cc)	60" iCD+

Available accessories:

Mulch kit, metal grass catcher (52"), LED light kit, professional striping kit, Kenda Terra Trac drive tires (52" & 60"), laser-edge blade sets,

500 HOUR OIL CHANGE

Vanguard engines with Oil Guard System reduce maintenance time and costs by up to 60%† (Select models)

SUSPENSION PLATFORM SYSTEM

The operator platform is suspended by a coil-over shock with five adjustable positions, optimizing operator comfort and increasing productivity

NEW iCD+ Cutting System

Redesigned to deliver next-level performance, increased durability and superior results

Generous fuel capacity

8 gallon fuel tank is centrally located for consistent balance, and the fuel filler neck is conveniently located on the side for easy filling

Hydro-Gear ZT-3800™ transaxles

Dual-commercial transaxles with remote oil coolers and 7" cooling fans with a 3-yr limited warranty†

Greaseable spindles for longer usable life

Cast-iron (60") or aluminum (52")

23" turf-friendly rear tires

Commercial-grade performance optimizes stability and traction

Ground speeds up to 10 mph

Cover more grass in less time for increased productivity

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† Cost savings based on oil maintenance with 100 hour interval versus Oil Guard System 500 hour service interval.

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.



SRS Z3X

Built to deliver superior traction and performance, the SRS Z3X raises the bar for stand-on productivity. With 52," 60" and 72" deck options and a pivoting front axle for extra grip on steep inclines, the Z3X increases efficiency without sacrificing safety or the trusted Ferris cut quality on even the most difficult properties.



MODEL	ENGINE OPTIONS	DECK
5901955	Kawasaki® FX850V (27 hp**/852 cc)	52" iCD
5902131	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™ (37 hp*/993 cc)	52" iCD
5902071	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™ (37 hp*/993 cc)	60" iCD+
5902170	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™ (37 hp*/993 cc)	72" iCD+

Available accessories:

Mulch kit, metal grass catcher (52"), LED light kit, professional striping kit, Kenda Terra Trac drive tires (60" & 72"), laser-edge blade sets, Kenda Turfsteel NPT (60" & 72")

500 HOUR OIL CHANGE

Vanguard engines with Oil Guard System reduce maintenance time and costs by up to 60%* (*Select models*)

PIVOTING FRONT AXLE WITH RADIUS RODS

Robust front axle ensures that all four wheels hold their contact, enhancing comfort and quality of cut

NEW iCD+ Cutting System

Redesigned to deliver next-level performance, increased durability and superior results

Suspension platform system

The operator platform is suspended by a coil-over shock with five adjustable positions, optimizing operator comfort and increasing productivity

Hydro-Gear ZT-4400 transaxles

Dual-commercial transaxles with 8" cooling fans with a 3-year limited warranty†

Large fuel capacity

Generous 11 gallon fuel tank is centrally located for consistent balance, and the fuel filler neck is conveniently located on the side for easy filling

24" turf-friendly rear tires

Commercial-grade performance tires optimize stability and traction to deliver up to 12 mph of ground speed

Locking 4-position speed control

No tools are required to set the speed control bar, in increments of 1-2 mph, for smooth operation to max travel speed of 12 mph

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† Cost savings based on oil maintenance with 100 hour interval versus Oil Guard System 500 hour service interval.

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

FERRIS®



SINCE 1909

ProCut™ S

Getting under low branches and along fencing is quick work for the front-mounted deck of the ProCut™ S. Easy to use and service, the ProCut S has high visibility and optional attachments to add to the utility.



MODEL	ENGINE OPTIONS	DECK
5900533 w/ 5900632	Kawasaki® FS730V (24 hp**/726 cc)	61"
5902106 w/ 5900632	Briggs & Stratton® CXi Series (27 hp*/810 cc)	61"

Available accessories:

Mulch kit, flat-free caster tires, professional striping kit

2+2 YEAR LIMITED WARRANTY† + 5-YEAR LIMITED SUSPENSION WARRANTY†

INDEPENDENT SUSPENSION TECHNOLOGY

Rear wheel suspension with adjustable coil-over shock

ELECTRIC DECK LIFT

The electric deck lift allows the operator to conveniently raise the cutter deck with the flip of a switch for momentary traction assistance and under-deck maintenance

Easy cut height adjustment

Quick-adjust height of cut control sets cut height from 1.5" to 5" in one easy step

Fabricated 10-gauge steel deck

Double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge

Hydrostatic drive

Hydraulic pump with integral 7" cooling fan, independent wheel motors, a remote oil reservoir and easy-to-service spin-on oil filter

22" turf-friendly drive tires

18" rear tire helps with steering

Ground speeds up to 8 mph

Cover more grass in less time for increased productivity

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

▶ “The controls and wide stance
allow you to mow places
others would not even try.”

- Emerald Lake Lawn, NH

WALK



FW15



FW25



FW45

FW SERIES

This isn't the mower you grew up pushing. Ferris Walk Behinds are meticulously built to help pros make quick work of trim and slope cutting. Ergonomic controls built around you and a variety of cutting widths make these mowers a valuable secret weapon for any crew. And, durable steel construction ensures they'll keep working hard, job after job.

2-YEAR LIMITED WARRANTY[†]

BEHINDS



FW15

The job isn't done until all the nooks and crannies of the property are mowed, including around trees and landscaping. That's why every crew needs a FW15 on the truck. This variable hydrostatic 32" commercial walk-behind is sturdy enough for the rigors of commercial work and is also maneuverable and easy to operate.

MODEL	ENGINE OPTIONS	DECK
5901737	Honda® GXV390 (10.2 hp [^] / 389 cc)	32"

Available accessories:

Mulch kit, cloth catcher



▶ **ONE-HAND OPERATION**

Comfortable, single-handed operation with adjustable speed control. The handlebars are adjustable with four positions for operator comfort

▶ **EASY CUT HEIGHT ADJUSTMENT**

Spring assisted, single adjustment point lever for easy cut height adjustment from 1.5" to 5"

Commercial-grade steel timed mower deck

32" compact fully-commercial, fabricated, reinforced, steel deck with dual timed cutting blades

Adjustable handlebars

4-position adjustable handlebars and adjustable speed control for one-handed operation

Peerless transaxle & Hydro-Gear pump

Peerless transaxle with differential chain driven by Hydro-Gear RT-310™ pump and motor for smooth maneuverability

Cast-aluminum spindles

Greaseable bearings provide a longer usable life

13" oversized drive tires

Large pneumatic drive tires and lightweight front wheels provide high traction

Ground speeds up to 4 mph

[^] Power rated by engine manufacturer.

FW25

Your crew will breeze through jobs with easy-to-use controls, electric start option, and 6 mph top ground speed on the FW25 walk-behind. With a choice of 36" and 48" deck widths, the FW25 fits most small sheds and trailers, while delivering superior control for navigating thick turf, surface imperfections, and hills.



MODEL	ENGINE OPTIONS	DECK
5901886 CC™ Controls	Kawasaki® FS600V (18.5 hp**/ 603 cc)	36"
5901887 Standard Controls	Kawasaki® FS600V (18.5 hp**/ 603 cc)	48"
5901888 CC™ Controls	Kawasaki® FS600V (18.5 hp**/ 603 cc)	48"

Available accessories:

Mulch kit, fabric grass catcher, metal grass catcher, professional striping kit (48"), weight kit, sulky, laser-edge blade sets (48")

► CRUISE CONTROL

Easily adjust the speed without removing your hands from the control handles while maintaining a clear view of the speed indicator

► EASIER-TO-USE CONTROLS

The Centralized Control (CC™) handle design comfortably places the operator's hands in the ideal position to access all in-demand controls (*Select models*)

Momentary PTO switch

Blades automatically disengage and keep the engine running when the foot activated neutral pedals are pressed

Fabricated 10-gauge steel deck

Double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge

Hand-removable deck pins

Change cut height in 0.5" increments from 1.5" to 4.5"

Hydro-Gear ZT-3100® transaxles

Dual-commercial transaxles with 7" cooling fans

Cast-aluminum spindles

Greaseable bearings with top access grease fittings for a longer usable life

Ground speeds up to 6 mph

Cover more grass in less time for increased productivity

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.



FW45

The FW45 is engineered for performance, productivity, and comfort. The 48" deck allows for maneuverability while engine options provide the power a commercial walk mower needs. Pairing comfort features like ergonomically designed controls with easy maintenance and durability mean the FW45 can handle whatever is thrown at it.

MODEL	ENGINE OPTIONS	DECK
5902014 CC™ Controls	Kawasaki® FX651V (20.5 hp**/ 726 cc)	48"
5901891 Standard Controls	Kawasaki® FX651V (20.5 hp**/ 726 cc)	52"
5902015 CC™ Controls	Kawasaki® FX651V (20.5 hp**/ 726 cc)	52"
5901892 Standard Controls	Vanguard® 810cc EFI with Oil Guard™ (28 hp*/ 810 cc)	52"
5901893 CC™ Controls	Vanguard® 810cc EFI with Oil Guard™ (28 hp*/ 810 cc)	52"
5902016 CC™ Controls	Kawasaki® FX730V (23.5 hp**/ 726 cc)	61"

Available accessories:

Mulch kit, fabric grass catcher (48" & 52"), metal grass catcher (48" & 52"), service jack, LED light kit, professional striping kit, weight kit, sulky, laser-edge blade sets



ADDED POWER AND PERFORMANCE

Powered by a 28 hp* Vanguard 810 EFI engine with Oil Guard, reduce maintenance time and costs by 60%† with a 500-hour oil change interval (*Select models*)

COOL OIL FOR EFFICIENT USE

External oil coolers for the dual Hydro-Gear ZT-3400 transaxles reduce oil temperature by as much as 25%, plus a new quick fill system makes maintenance that much easier

Easier-to-use controls

The Centralized Control (CC) handle design comfortably places the operator's hands in the ideal position to access all in-demand controls (*Select models*)

Extra protection

The additional protection shields the 5-gallon gas tank, Oil Guard tank, and muffler from punctures and debris

Fabricated 10-gauge steel deck

Double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge

Single-lever operated deck lift

Quick adjust crank changes height variably from 1.5" to 5"

Momentary PTO switch

Blades automatically disengage and keep the engine running

Ground speeds up to 7 mph

Cover more grass in less time for increased productivity

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† Cost savings based on oil maintenance with 100 hour interval versus Oil Guard System 500 hour service interval.

COLLECTION

► FEATURES

TURBO-PRO™

The TURBO-Pro System is a lightweight blower assembly ideal for use with compact models in all cutting conditions throughout the entire season.



Generous 6" diameter outlet hose



Durable composite impeller housing with reinforced metal plate for high contact debris areas

Heavy-duty oversized drive and idler pulleys combined with long drive belt allow for cool running and maximum belt life



Curved steel blade impeller reduces noise

After initial installation, the **quick attach design** can be mounted or removed with no tools in a few minutes

TURBO-Pro Blower*
Width: 19"
Weight: 56 lbs
Impeller fin: 2"

TURBO-PRO™ MAX

This go-to system for landscapers acts as a lawn vacuum for a clean finish. It quickly mounts to the deck with tool-less stainless steel hardware. It is ideal for use in all conditions found throughout the season.




Extra wide 7" diameter outlet hose

Twice the air flow vs. Turbo-Pro for increased capacity on larger decks cutting at higher speeds



Rugged steel impeller housing designed for extended life

Heavy-duty oversized drive and idler pulleys combined with long drive belt allow for cool running and maximum belt life



After initial installation, the **quick attach design** can be mounted or removed with no tools in a few minutes

TURBO-Pro Max Blower*
Width: 21"
Weight: 62 lbs
Impeller fin: 4"

FAST-VAC®

The rugged impeller utilizes industrial-grade bearings, generating phenomenal air flow for use in heavy and wet cutting conditions. Its spindle-driven vertical turbo is narrower, allowing you to get in and out of tight places.



Extra wide 7" diameter outlet hose



Super rugged impeller rides on industrial-grade bearings to generate a phenomenal air flow



Commercial-grade idler and pulleys drive the vertical, spindle-driven turbo resulting in a very narrow profile for improved maneuverability

FAST-Vac Blower*
Width: 15"
Weight: 88 lbs
Impeller fin: 4"

SYSTEMS

COMPATIBILITY

TURBO-PRO SYSTEM

CLEAN SWEEP TWIN

The twin bag system is easy to install and features durable materials for reliable debris cleanup. Capacity: 8 cu. ft.



2-BAG HARD TOP

The double bag collection system is simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Capacity: 10 cu. ft.



3-BAG HARD TOP

Innovative molded hard top design allows for increased capacity. Simple to install. Each heavy-duty mesh bag has an integrated handle to assist with removal. Capacity: 15 cu. ft.



500S

48" / 52" / 61"

N/A

N/A

IS 600

N/A

48" / 52"

N/A

IS 700

N/A

52" / 60"

N/A

ISX 800

N/A

52"

52" / 60"

TURBO-PRO MAX & FAST-VAC SYSTEMS

2-BAG SOFT TOP

The double bag collection system is simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Capacity: 9 cu. ft.



3-BAG SOFT TOP

Simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Capacity: 12.5 cu. ft.



ELECTRIC DFS

(Dump From Seat) Simply flip the switch on the control panel to release the hopper right from your seat. Capacity: 12.5 cu. ft.



EZ DUMP™

(Dump From Seat) Simply pull up to release the hopper right from your seat. The hopper is specially lined to ensure that all material is dumped. Capacity: 12 cu. ft.



EZ DUMP XL™

(Dump From Seat) Ideal for larger jobs. Simply pull up to release the hopper right from your seat. The hopper is specially lined to ensure that all material is dumped. Capacity: 14 cu. ft.



ISX 3300

N/A

60"
TURBO-Pro Max

60"
TURBO-Pro Max

N/A

60"
TURBO-Pro Max

ISX 2200

52"
TURBO-Pro Max

52" / 60"
TURBO-Pro Max

52" / 60"
TURBO-Pro Max

52" / 60"
TURBO-Pro Max

N/A

* Dimensions listed are the dimensions of the blower unit and do not represent what they might actually add to the mower.

ACCESSORIES &

► FEATURES



NEW Fender Kit

Protects the engine from debris while also allowing for easy service access.
Fits: ISX Series



NEW Michelin® X® Tweel® Turf Airless Radial Tires

Fits: ISX 3300



Kenda Turfsteel NPT

Tire only, no rim.
Fits: ISX 2200 60" & SRS Z3X 60"/72"



Kenda Terra Trac Drive Tires

Tire only, no rim. *(Select models and deck sizes)*



Flat-Free Caster Tires

Run all day with no flats.
(Standard on select models)



Headrest Kit

Suspension seat for optimal comfort.
Fits: ISX 2200, ISX 3300, IS 6200



Mulch Kit

Select kits include dedicated mulching blades, baffles, hardware and instruction sheet.
Fits: all models.



Fabric Grass Catcher

Durable, fabric bag with hard plastic bottom; attaches quickly. Capacity: 3.75 or 3.25 bushels. *(Select models)*



Metal Grass Catcher

Rugged steel framed catcher has handles that make attaching and removing a breeze. Capacity: 4.3 bushels. *(Select models)*




FW15 Bagger

Durable, fabric bag with 7" hose and 90° inlet. Capacity: 2.5 bushels.



One Wheel & Two Wheel Sully

Includes mounting hardware.
Fits: FW25 and FW45.



Professional Striping Kit

Rubber flap system lays down grass to create patterns across the landscape. *(Select models and deck sizes)*



Laser-Edge Blade Sets

Hardware not included. *(Select models and deck sizes)*



Magnetic Deck Pin

Conveniently and quickly adjust the deck's height of cut with this magnetized and durable pin.
Available in 1/2" pins.



ROPS LED Light Kit

Models are pre-wired for simple installation. *(Select models)*



LED Light Kits

Pre-wired kit and new kits with a wire harness for simple installation. *(Select models)*



Service Jack

Heavy-duty steel bracket and jack allow for easy and convenient access to under the deck. Fits: all zero turn models.



Trailer Hitch Kit

Will accept a 1/2" shank ball and comes complete with hardware.
Fits: all zero turn models.

ATTACHMENTS

COMPATIBILITY

	E SERIES	F SERIES	S SERIES	IS SERIES		ISX SERIES			DIESEL IS SERIES		
	300e	F60	300S	500S	IS 600	IS 700	ISX 800	ISX 2200	ISX 3300	IS 2600	IS 6200
NEW Fender Kit	N/A	N/A	N/A	N/A	N/A	N/A	Available	Available	Available	N/A	N/A
Headrest Kit	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Available	Available	N/A	Available
Kenda Turfsteel NPT	N/A	N/A	N/A	N/A	N/A	N/A		Available			
Michelin Tweel Tires	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Available	N/A	N/A
Kenda Terra Trac Drive Tires	N/A	N/A	N/A	N/A	N/A	N/A	Available	Available	Available	Available	Available
Flat-Free Caster Tires	N/A	Standard	N/A	N/A	Available	Available	Available	Available	Standard (Select SKUs)	Available	Available
Mulch Kit	Available	Available	Available	Available	Available	Available	Available	Available	Available	Available	Available
Metal Grass Catcher	N/A	Available	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Professional Stripe Kit	N/A	N/A	N/A	N/A	Available	Available	Available	Available	Available	Available	Available
Laser-Edge Blade Sets	N/A	N/A	N/A	N/A	Available	Available	Available	Available	Available	Available	Available
Magnetic Deck Pin	N/A	N/A	N/A	N/A	Available	Available	Standard	Standard	Standard	Standard	N/A
ROPS LED Light Kit	N/A	N/A	N/A	N/A	Available	Available	Available	Available	Available	Available	Available
LED Light Kit	Available	N/A	N/A	Standard	Available	N/A	N/A	N/A	N/A	N/A	N/A
Service Jack	N/A	Available	N/A	Available	Available	Available	Available	Available	Available	Available	Available
Trailer Hitch Kit	Available	Available	Available	Available	Available	Available	Available	Available	Available	Available	N/A

	SRS SERIES			PROCUT SERIES
	SRS Z1	SRS Z2	SRS Z3X	ProCut S
NEW Kenda Turfsteel NPT	N/A	N/A	Available	N/A
Kenda Terra Trac Drive Tires	Available 48" Models Only	Available	Available 60" & 72" Models Only	N/A
Flat-Free Caster Tires	Standard	Standard	Standard	Available
Mulch Kit	Available	Available	Available	Available
Metal Grass Catcher	Available	Available 52" Models Only	Available 52" Models Only	N/A
Professional Stripe Kit	Available 48" Models Only	Available	Available	Available
Laser-Edge Blade Sets	Available 48" Models Only	Available	Available	Available
LED Light Kit	Available	Available	Available	N/A
Service Jack	Available	N/A	N/A	N/A

	FW SERIES		
	FW15	FW25	FW45
Mulch Kit	Available	Available	Available
Fabric Grass Catcher	Available	Available	Available 48" & 52" Models Only
Metal Grass Catcher	N/A	Available	Available 48" & 52" Models Only
FW15 Bagger	Available	N/A	N/A
Sulky	N/A	Available	Available
Professional Stripe Kit	N/A	Available Except on 36" Models	Available
Laser-Edge Blade Sets	N/A	Available 48" Models Only	Available
LED Light Kit	N/A	N/A	Available
Service Jack	N/A	N/A	Available
Counter Weight Kit	N/A	Available	Available

BLOWERS



FB1000



FB2000



FB3000



“ What I like best is the time
that it has saved us.”

- David, Milwaukee County Zoo, WI

FB SERIES

Step up your turf clean up game with the Ferris line of stand-on blowers to ensure you leave behind clean, healthy lawns. Designed to provide maximum air flow and power for effective lawn clean up and debris management, the Hurricane™ signature patented Dual Air Flow System™ splits the air-stream for deep cleaning and blowing the debris to the desired distance.

2-YEAR LIMITED WARRANTY- STANDARD USE[†] + 1-YEAR LIMITED WARRANTY - RENTAL USE[†]




HURRICANE TECHNOLOGY

Ferris Hurricane stand-on blowers bring patented systems and a history of high-quality, time-saving equipment to an easy-to-use platform for powerful debris management. Whether it's for prepping surfaces to be paved, clearing a property of clippings, or blowing away a large number of leaves for fall, Ferris blowers are built to get the entire job done quickly and comfortably.

PATENTED DUAL DEFLECTOR AIR FLOW SYSTEM™

to split the air for optimal angle
and flow of cleaning

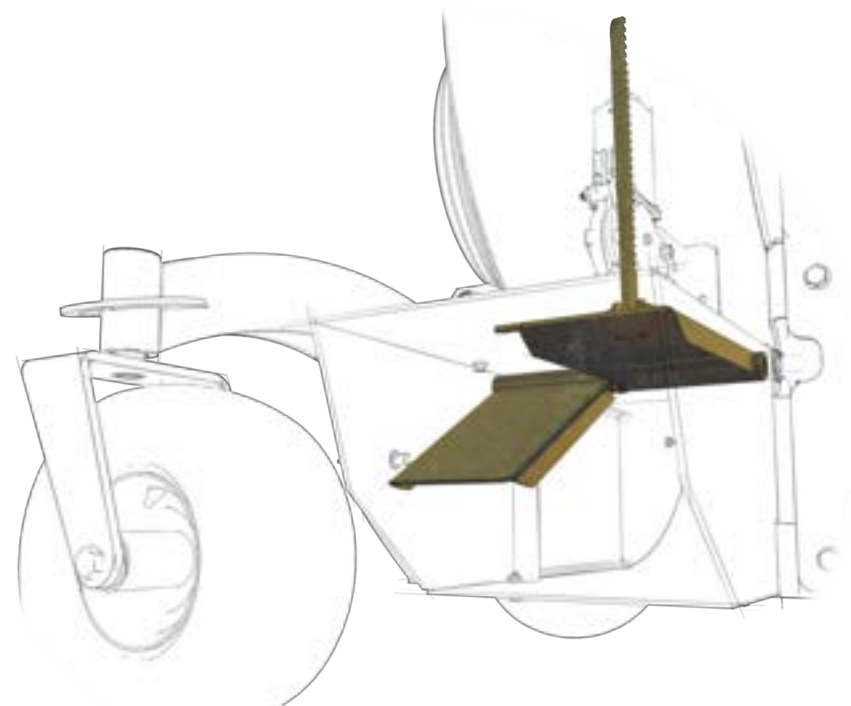

AIRFLOW SYSTEM

Fall leaf cleanup, grass clipping maintenance, or special job area management is a time-consuming job. Handheld and backpack blowers quickly hit their limits when you need to cover large areas or if the debris is piled high. Plus, they demand additional manual labor to get the job done effectively. Stand-on blowers provide you the efficiency and capability to get more done and get more money in your pocket.

Easily control the direction of airflow through left, right, or center (varies by model) air chutes for efficient cleaning


Air shut off on all chutes for non-disruptive travel from job to job

Integrated headlight for clear clean up (*select models*)

Zero turning radius for nimble control of the unit

Cushioned operator platform for sustained comfort

Built-in tie-downs for easy transportation

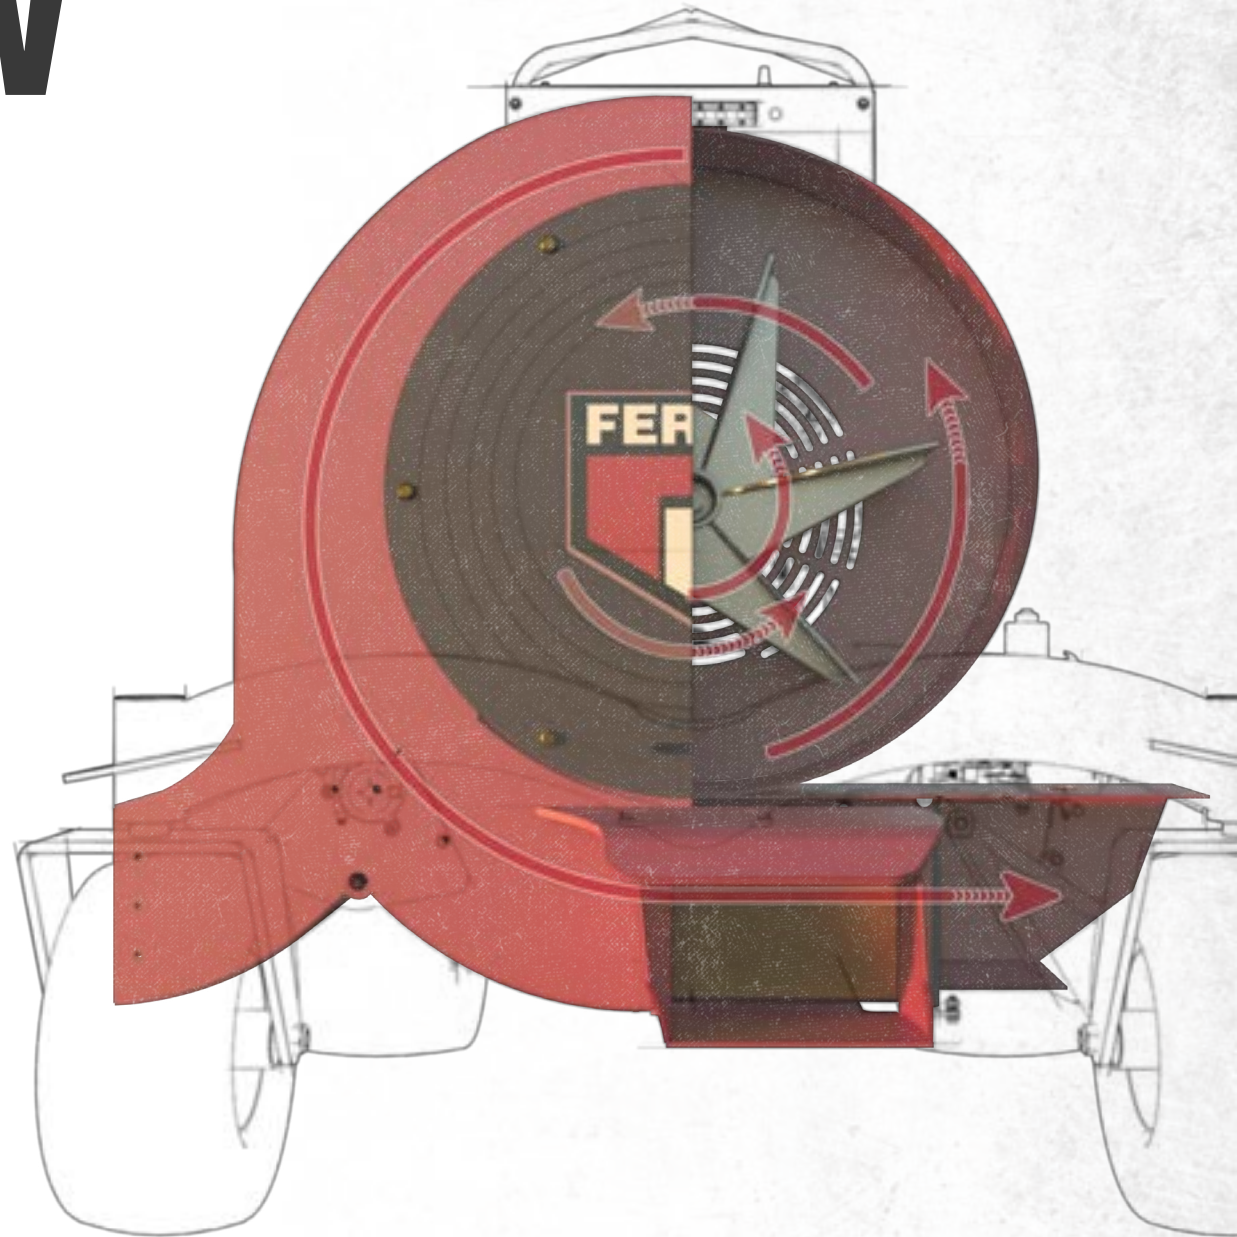



FB1000 HURRICANE

The perfect addition to any growing lawn care fleet, the FB1000 Hurricane provides compact debris management without sacrificing air-blowing power. The 35.5-inch overall width makes it easy to navigate through gates and fit onto a trailer. A large impeller and air inlet delivers 3500 cfm of hands-free cleaning power.

3500 cfm
AIR FLOW

150+ mph
AIR SPEED

8 mph
GROUND SPEED

MODEL

5902012

ENGINE OPTIONS

Vanguard® V-Twin (18 hp*/570 cc)



► PATENT-PENDING FOOT CONTROL

Keep your hands on the controls and maintain your productivity with the easy-to-use and patent-pending foot-driven airflow control. Features left and right airflow

► COMPACT POWER

The compact frame makes it easy to navigate jobs and still holds enough power with an 18 hp* Vanguard V-Twin engine and large impeller system

Comfortable productivity

The fold-up operator platform is isolated from the bumps of the job through polymer platform bumpers

Vanguard V-Twin engine

Delivering 18 hp* of reliable power, the Vanguard engine is built to last through the most demanding of jobs

Convenient controls

Simple operator controls feature choke and throttle control, key-operated start and ergonomic steering controls

Confident traction

The 20" x 8 - 8 drive tires optimize stability and traction while the flat-free front caster tires deliver reliable control

Adjustable air flow

Adjustable air outlets allow for the directed control of airflow to enhance the deep cleaning of debris

Large, powerful impeller

The vertical impeller and horizontal shaft engine layout prevents clogging in heavy debris conditions while delivering 3500 cfm and 150+ mph of air cleaning power

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

FB2000 HURRICANE

The FB2000 Hurricane stand-on blower is designed for precise and effective debris management. With an airflow of 4500 cfm and air velocity of 165+ mph, fall leaf clean up and moving debris is easy. Air flow is changeable from the operator station with three directions - left, right and front making it easy to operate.

4500 cfm
AIR FLOW

165+ mph
AIR SPEED

8 mph
GROUND SPEED

MODEL

5902132

ENGINE OPTIONS

Vanguard® V-Twin (23 hp*/627 cc)



▶ DUAL DEFLECTOR AIR FLOW SYSTEM™

The patented split left deflector system allows the operator to change the angle of the air flow to enhance the deep cleaning of debris

▶ 4500 CFM AIR FLOW

Move debris quickly with powerful air flow and air speeds of 165+ mph

Joystick deflector control

The joystick allows the operator full control of the air flow direction – forward, left and right. Pulling back on the joystick closes all deflectors for transport

Quad Control Handle System™

This system provides automatic return to neutral, integrated operator presence, self-activating parking brake and travel direction control

LED light in operator tower

Provides extra illumination when loading trailers or traveling at dusk

Torsion-mounted front axle

Allows the wheels to remain in contact with the ground, improving traction on uneven terrain

Product may vary from the image shown.

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

FB3000 HURRICANE

The toughest debris-management jobs call for the FB3000 Hurricane, which is engineered for maximum airflow of 7500 cfm and air speed of 165+ mph. This unit features an innovative blower design which allows the FB3000 to pull air from both sides, increasing power and reducing noise.

7500 cfm
AIR FLOW

165+ mph
AIR SPEED

9 mph
GROUND SPEED

MODEL

5902135

ENGINE OPTIONS

Vanguard® V-Twin (35 hp*/993 cc)



▶ DUAL DEFLECTOR AIR FLOW SYSTEM

The patented split left deflector system allows the operator to change the angle of the air flow to enhance the deep cleaning of debris

▶ 7500 CFM AIR FLOW

Move debris quickly with powerful air flow and air speeds of 165+ mph

Joystick deflector control

The joystick allows the operator full control of the air flow direction – forward, left and right. Pulling back on the joystick closes all deflectors

Quad Control Handle System™

This system provides automatic return to neutral, integrated operator presence, self-activating parking brake and travel direction control

LED light in operator tower

Provides extra illumination when loading trailers or traveling at dusk

Torsion-mounted front axle

Allows the wheels to remain in contact with the ground, improving traction on uneven terrain

2-way air intake

Blower housing design pulls air from both sides for more power and less noise

Product may vary from the image shown.

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

SPREADER



ROVER™



PATHFINDER™



VENTURE™

FS SERIES

We take care of you, so you can take care of your customers. The Ferris line of spreaders and spreader/sprayers allows you to provide a personalized treatment for each of your clients. No more one size fits all application of granular and liquid chemicals. These ride-on spreader/sprayers give you the flexibility to treat each lawn with the mixture it needs.

1-YEAR LIMITED WARRANTY- STANDARD USE[†] + 90 DAY LIMITED WARRANTY - RENTAL USE[†]

/SPRAYERS



HEALTHY LAWNS MEAN HAPPY CUSTOMERS

Like sunshine and water, grass and soil need fertilizer and other treatments to stay as beautiful as possible. Proper lawn treatment ensures the grass gets essential nutrients like nitrogen, phosphorus and potassium to thrive. Treated lawns are healthier, look better and are more enjoyable. As a total lawn care specialist, you cut the grass and enable it to succeed, which means a happier customer and a more significant bottom line for you.

▶ SO WHY CHOOSE FERRIS?

DIVERSE SOLUTIONS

Ferris provides time-saving and feature-packed lawn treating solutions in a variety of sizes and capabilities.

THOUGHTFUL DESIGN

100% stainless steel frame resists corrosive granular and liquid chemicals for longer usable life, while the thoughtful components make for easy maintenance and simple material loading.


EXCELLENT MANEUVERABILITY

Empowered by our expertise in productive mowing, our turf care equipment is capable of navigating properties with ease with either a low-friction sulky or easy-to-use zero turn-like controls.



Ride-on spreaders make quick work of the granular application. The Ferris Rover and Rover XC can cover .6 and 1.2 acres, respectively, through their large material hopper. This material is then effortlessly and evenly applied to the lawn through the durable platter that spins with the machine's momentum.

SPREADERS

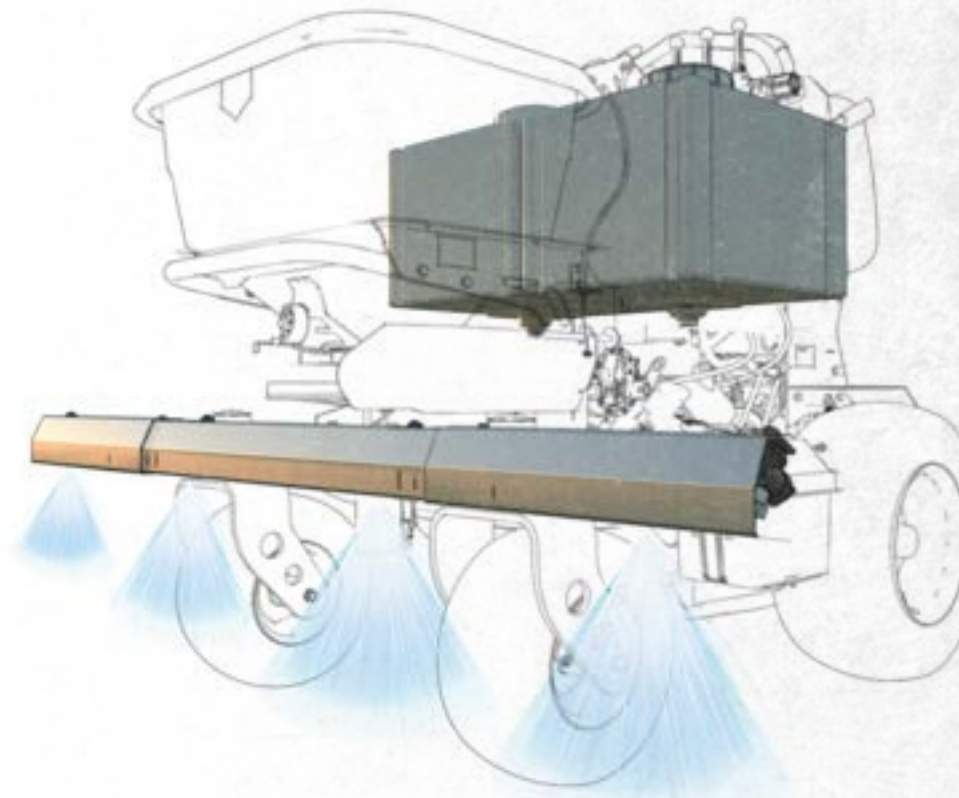

Combining granular spreading with efficient liquid application, stand-on spreader/sprayers are the best of both worlds. The Ferris Pathfinder and Venture provide increasing material capacity and coverage, providing unique options for the jobs at hand. The durable stainless steel sprayer booms offer reliable and consistent liquid application, while the sulky or zero turn-like drive style gives confident control.

SPREADER/SPRAYERS

ROVER

The Rover XC FS1200 is a rugged ride-on spreaders with a 35.5" frame for easy access through gates and other tight spots. The Rover is designed for granular applications with components that resist the corrosive effects of these chemicals. A low center of gravity provides excellent performance on sloped terrain.

Rover XC FS1200

► COVERAGE



1.2
Acres



MODEL	ENGINE OPTIONS	CAPACITY
5902000 (XC)	Vanguard® 160 (5 hp*/169 cc)	200 lbs. granular

► SPYKER HOPPER

Rover FS1100 has 100 lbs. granular capacity and Rover XC FS1200 has 200 lbs. granular capacity

► ERGONOMIC CONTROLS

Dry pattern and throttle on the right; pattern deflector and gate control on the left

Coated transmission for corrosion resistance

Peerless 855 gear drive, with two speeds forward (3.5 or 5 mph) plus reverse

100% stainless steel frame

Resists corrosion from the granular chemicals distributed by the unit

Low friction sully

Low friction pivot point with 3/4" tapered roller bearings for smooth turning

18" turf-friendly front tires

18" x 9.5 - 8, RV antifreeze added for ballast and traction

Ground speeds up to 5 mph

Speeds up to 3.5 mph in low gear

Centrally located fuel tank


Fuel capacity of 0.82 gallons of unleaded gasoline

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.


PATHFINDER

The Pathfinder FS2100 and Pathfinder XC FS2200 ride-on spreader/sprayers release dry and liquid material with a spray system that has settings for both trim and broadcast applications. The steel frame and Peerless transaxle resist corrosive chemicals for longevity and durability, and a 35.5" width means easy access through tight areas like gates.

Pathfinder FS2100



Pathfinder XC FS2200



MODEL	ENGINE OPTIONS	CAPACITY	SPRAY
5901752	Honda® GX200-URH2 (5.8 [^] hp/196 cc)	100 lbs. granular	12 gal.
5901753 (XC)	Honda® GX200-URH2 (5.8 [^] hp/196 cc)	200 lbs. granular	16 gal.

► SPYKER HOPPER

Pathfinder FS2100 has 100 lbs. granular capacity and Pathfinder XC FS2200 has 200 lbs. granular capacity

► HIGH LIQUID SPRAY CAPACITY

Pathfinder FS2100 has 12 gallons of liquid capacity and Pathfinder XC FS2200 has 16 gallons of liquid capacity

Coated transmission for corrosion resistance

Peerless 855 gear drive with two speeds forward (3.5 or 5 mph) plus reverse

100% stainless steel frame

Resists corrosion from the granular and liquid chemicals distributed by the unit

Low friction sully

Low friction pivot point with 3/4" tapered roller bearings for smooth turning

18" turf-friendly front tires

18" x 9.5 - 8, RV antifreeze added for ballast and traction

Ground speeds up to 5 mph

Speeds up to 3.5 mph in low gear

Fuel capacity of 2.5 gallons of unleaded gasoline

Centrally located fuel tank


[^] Power rated by engine manufacturer.




VENTURE

You can't beat the efficiency of a zero turn ride-on sprayer/spreader. The Venture FS3100 and Venture XC FS3200 have a variable spray system with four spray widths plus a spray wand ideal for a variety of applications. Dual liquid spray tanks provide up to 2.2 acres of coverage and a stainless steel frame resists corrosive chemicals for added life.

Venture FS3100



Venture XC FS3200



MODEL	ENGINE OPTIONS	CAPACITY	SPRAY
5901754	Vanguard® V-Twin (18 hp*/ 570 cc)	100 lbs. granular	24 gal.
5901755 (XC)	Vanguard® V-Twin (18 hp*/ 570 cc)	200 lbs. granular	24 gal.

► SPYKER HOPPER

Venture FS3100 has 100 lbs. granular capacity and Venture XC FS3200 has 200 lbs. granular capacity

► 24 GALLONS OF SPRAY CAPACITY

Twin 12 gallon tanks on both models

3-section breakaway boom

Boom arms fold in for access through gates and trailers

Hydro-Gear ZT-3100 transaxles

Dual-commercial transaxles with 7" cooling fans to repel debris

100% stainless steel frame

Resists corrosion from the granular and liquid chemicals distributed by the unit

Zero turn maneuverability

Maneuver in tight areas with zero turn functionality provided by Hydro-Gear transaxles

20" turf-friendly rear tires

Ground speeds up to 8 mph

Fuel capacity of 2.5 gallons of unleaded gasoline

Centrally located fuel tank

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

SPECIFICATIONS

F SERIES

F60	
Part #:	5901895
Engine Brand	Kawasaki® FX600V
Power Rating (hp)	19**
Displacement (cc)	603
PTO	Electric
Cylinders	2
Starter	Electric
Oil Guard™ System	N/A
Fuel Tank Capacity (gal)	8
MOWER DECK	
Cutting Width (in)	36
Cutting Height (in)	1.5 - 4.5
Spindles	Aluminum greaseable
Deck Construction	Fabricated 10-gauge
SUSPENSION & DRIVE TRAIN	
Suspension	
Transmission	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" cooling fans
Drive Axles (in)	1
Caster Tires (in)	11 x 4 - 5, Flat-free
Drive Tires (in)	20 x 7 - 10
SPEED	
Speeds-Fwd (mph)	0 - 7
Speeds-Rev (mph)	0 - 4
DIMENSIONS	
Overall Length (in)	73.75
Overall Width (in) Deflector Down / Up	49.5 / 40.5
Dry Weight (lbs)	732
OPERATOR SYSTEMS	
Seat Package	Mid-back seat with arm rests
Instrumentation	Fuel level gauge in each tank, dual-function hour meter
ROPS	N/A
Controls / Safety Group	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls
Parking Brake / Safety Circuit	Hand-operated internal transaxle brake
WARRANTY	
Engine	3-Year limited manufacturer's warranty †
Balance of Machine	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coverage on other components varies, please see operator's manual for complete details. †

S SERIES

► Indicates Model Upgrade/Increase

300S			500S			
5902144	5902143	5902142	5902101	5902102	5902056	5902103
Briggs & Stratton® PXi Series™	Briggs & Stratton® PXi Series™	Briggs & Stratton® PXi Series™	Briggs & Stratton® CXi Series	Briggs & Stratton® CXi Series	Kawasaki® FR730V	Briggs & Stratton® CXi Series
23*	23*	25*	25*	25*	24**	25*
724	724	724	724	724	726	724
Electric			Electric			
2			2			
Electric			Electric			
N/A			N/A			
3			3			
42	48	52	48	52	61	
1.5 - 4.5			1.5 - 4.5			
Aluminum greaseable			Aluminum greaseable			
Fabricated 12-gauge	Fabricated 10-gauge	Fabricated 10-gauge	Fabricated 10-gauge			
Front suspension	Front and rear adjustable dual coil-over shocks		Front and rear adjustable dual coil-over shocks			
Hydro-Gear® EZT transaxles		Dual Hydro-Gear® ZT-2800® transaxles with 7" cooling fans	Dual Hydro-Gear® ZT-2800® transaxles with 7" cooling fans	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" cooling fans		
1		1				
11 X 6 - 5		13 X 6.5 - 6				
20 x 8 - 8	20 x 10 - 8	20 x 10 - 10	22 x 10 - 10	22 X 11 - 10		
0 - 7		0 - 8	0 - 8.5			
0 - 4		0 - 4				
72		78.5			80	
55 / 45	59 / 49	65 / 53	53	64	74	
563	627	689	757	826	832	
Mid-back seat with arm rests			Mid-back seat with arm rests			
Hour meter, fuel level gauge in tank			Hour meter, fuel level gauge in tank			
N/A			N/A			
Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls			Adjustable twin fold out 1" tubular steering levers with comfort grip			
Hand-operated internal transaxle brake			Hand-operated internal transaxle brake			
2-Year limited manufacturer's warranty †			3-Year limited manufacturer's warranty †			
Consumer Warranty (Product), 3-Years / Commercial Warranty (Product), 90-Days†			Consumer Warranty (Product), 3-Years / Commercial Warranty (Product), 90-Days†			

SPECIFICATIONS

IS SERIES

► Indicates Model Upgrade/Increase

IS® 600					IS® 700	
Part #:	5901908	5902110	5901911	5902109	5902107	5902061
Engine Brand	Kawasaki® FS600V	Briggs & Stratton® CXi Series	Kawasaki® FS691V	Briggs & Stratton® CXi Series	Briggs & Stratton® CXi Series	
Power Rating (hp)	18.5**	25*	23**	25*	27*	
Displacement (cc)	603	724	726	724	810	
PTO	Electric				Electric	
Cylinders	2				2	
Starter	Electric				Electric	
Oil Guard™ System	N/A				N/A	
Fuel Tank Capacity (gal)	5.5				5.5	
MOWER DECK						
Cutting Width (in)	48		52	52		60
Cutting Height (in)	1.5 - 4.5				1.5 - 5	
Spindles	Aluminum greaseable				Aluminum greaseable	
Deck Construction	Fabricated 10-gauge				iCD™ Cutting System	
SUSPENSION & DRIVE TRAIN						
Suspension	Adjustable front and rear coil-over shocks with pivoting front axle and a rear swing-arm with large adjustable coil-over shocks				Adjustable front and rear coil-over shocks with pivoting front axle and a rear swing-arm with large adjustable coil-over shocks	
Transmission	Dual commercial Hydro-Gear® ZT-3200™ transaxles with 7" cooling fans				Dual commercial Hydro-Gear® ZT-3200™ transaxles with 7" cooling fans	
Drive Axles (in)	1.125				1.125	
Caster Tires (in)	13 x 6.5 - 6				13 x 6.5 - 6	
Drive Tires (in)	22 x 11 - 10				22 x 11 - 10	
SPEED						
Speeds-Fwd (mph)	0-10				0-10	
Speeds-Rev (mph)	0-5				0-5	
DIMENSIONS						
Overall Length (in)	80				81	
Overall Width (in) Deflector Down / Up	63 / 51		65 / 57	65 / 57		74 / 65
Dry Weight (lbs)	942		964	1059		1140
OPERATOR SYSTEMS						
Seat Package	Mid-back seat with arm rests				Mid-back suspension seat with adjustable arm rests	
ROPS	180° foldable				180° foldable	
Instrumentation	Dual-function hour meter, fuel level gauge in tank				Dual-function hour meter, fuel level gauge in tank	
Controls / Safety Group	Adjustable twin fold out 1" tubular steering levers with comfort grip				Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls	
Parking Brake / Safety Circuit	Hand-operated internal transaxle brake				Hand-operated internal transaxle brake	
WARRANTY						
Engine	3-Year limited manufacturer's warranty [†]				3-Year limited manufacturer's warranty [†]	
Balance of Machine	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Belts, tires, brake pads, battery, blades: 90 days. Coverage on other components varies, please see operator's manual for complete details					

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

[†] See operator's manual or ferrismowers.com for complete warranty details.

Refer to the engine operator's manual for engine warranty details.

SPECIFICATIONS

ISX SERIES

► Indicates Model Upgrade/Increase

ISX™ 800							ISX™ 2200						
Part #:	5902083	5902084	5902073	5902074	5902075	5902172	5902089	5902090	5902088	5902079	5902080	5902078	
Engine Brand	Kawasaki® FT730V	Briggs & Stratton® CXi Series	Kawasaki® FT730V	Kawasaki® FT730V-EFI	Briggs & Stratton® CXi Series	Briggs & Stratton® CXi Series EFI-ETC with Oil Xtend™	Kawasaki® FX801V	Kawasaki® FT730V-EFI	Vanguard® 810cc EFI with Oil Guard™	Kawasaki® FX801V	Kawasaki® FT730V-EFI	Vanguard® 810cc EFI with Oil Guard™	
Power Rating (hp)	24**	27*	24**	26**	27*	27*	25.5**	26**	28**	25.5*	26**	28*	
Displacement (cc)	726	810	726	726	810	810	852	726	810	852	726	810	
PTO	Electric						Electric						
Cylinders	2						2						
Starter	Electric						Electric						
Oil Guard™ System	N/A						N/A		Standard	N/A		Standard	
Oil Xtend™ System	N/A					Standard	N/A						
Fuel Tank Capacity (gal)	5.5						11						
MOWER DECK													
Cutting Width (in)	52	60					52			60			
Cutting Height (in)	1.5 - 5						1.5 - 5						
Spindles	Aluminum greaseable						Cast-iron greaseable						
Deck Construction	iCD™ Cutting System, 2-belt		iCD™+ Cutting System, 2-belt				iCD™ Cutting System, 2-belt			iCD™+ Cutting System, 2-belt			
SUSPENSION & DRIVE TRAIN													
Suspension	ForeFront™ Suspension System - Front independent with four cast-iron control rods paired with medium size adjustable coil-over shocks and a rear swing-arm with large adjustable coil-over shocks						ForeFront™ Suspension System - Front independent with four control rods paired with large size adjustable coil-over shocks and a rear swing with large adjustable coil-over shocks						
Transmission	Dual commercial Hydro-Gear® ZT-3400® transaxles with 7" cooling fans						Dual commercial Hydro-Gear® ZT-4400™ transaxles with 8.3" cooling fans						
Drive Axles (in)	1.125						1.375						
Caster Tires (in)	13 x 6.5 - 6						13 x 6.5 - 6						
Drive Tires (in)	23 x 10.5 - 12						24 x 9.5 - 12			24 x 12 - 12			
SPEED													
Speeds-Fwd (mph)	0 - 10						0 - 10						
Speeds-Rev (mph)	0 - 5						0 - 5						
DIMENSIONS													
Overall Length (in)	81						82.5						
Overall Width (in) Deflector Down / Up	65 / 57	74 / 65				67 / 57			74 / 65				
Dry Weight (lbs)	1206	1268				1232	1335	1302	1405				
OPERATOR SYSTEMS													
Seat Package	Premium mid-back suspension seat with adjustable arm rests						Premium high-back Suspension Seat with adjustable arm rest, adjustable lumbar and back recline						
ROPS	180° foldable						180° foldable						
Instrumentation	Dual-function hour meter, fuel level gauge in tank						Dual-function hour meter, fuel level gauge in each tank						
Controls / Safety Group	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls						Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls						
Parking Brake / Safety Circuit	Hand-operated internal transaxle brake						Hand-operated internal transaxle brake						
WARRANTY													
Engine	3-Year limited manufacturer's warranty †												
Balance of Machine	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Coverage on other components varies, please see operator's manual for complete details. †												

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

SPECIFICATIONS

ISX SERIES

ISX™ 3300							
5902066	5902067	5902065	5902064	5902161	5902160	5902145	
Kawasaki® FX921V	Vanguard® BIG BLOCK™	Kawasaki® FX1000V EFI	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™	Vanguard® BIG BLOCK™	Kawasaki® FX1000V EFI	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™	
31**	▶	36*	▶	38.5**	▶	40*	▶
999		993	▶	999	▶	999	▶
Electric							
2							
Electric							
N/A			▶	Standard	N/A		▶
N/A							
11							
				▶			
60					72		
1.5 - 5							
Hercules™ II Cast-Iron greaseable							
iCD™+ Cutting System, 2-belt							
ForeFront™ Suspension System - Front independent with four control rods paired with large size adjustable coil-over shocks and a rear swing with large adjustable coil-over shocks							
Dual commercial Hydro-Gear® ZT-5400 Powertrain® transaxles with 9" cooling fans							
1.375							
13 x 6.5 - 6			13 x 6.5-6, Flat Free		13 x 6.5 - 6		13 x 6.5-6, Flat Free
26 x 12 - 12							
0-12							
0-5							
84.5							
74 / 65				86 / 74			
1496			1634		1579		1717
Premium high-back Suspension Seat with adjustable arm rest, adjustable lumbar and back recline							
158° foldable							
Dual-function hour meter, fuel level gauge in each tank							
Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls							
Hand-operated internal transaxle brake							
3-Year limited manufacturer's warranty †							
4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Belts, tires, brake pads, battery, blades: 90 days.							

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.
** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

^ Power rated by engine manufacturer.

IS DIESEL SERIES

▶ Indicates Model Upgrade/Increase

IS® 2600		IS® 6200
Part #:	5901929	5902162
Engine Brand	Yanmar™ diesel	CAT® Turbo diesel
Power Rating (hp)	24^	48^
Displacement (cc)	904	1700
PTO	Electric	Electric, 450 ft lbs
Cylinders	3	3
Starter	Electric	Electric
Oil Guard™ System	N/A	N/A
Oil Xtend™ System	N/A	N/A
Fuel Tank Capacity (gal)	11	15
MOWER DECK		
Cutting Width (in)	61	72
Cutting Height (in)	1.75 - 5	1.5 - 6
Spindles	Cast-iron greaseable	Hercules™ II Cast-iron greaseable
Deck Construction	iCD™ Cutting System	iCD™+ Cutting System, 2-belt
SUSPENSION & DRIVE TRAIN		
Suspension	Independent front control arms with large adjustable coil-over shocks and a rear swing-arm with large adjustable coil-over shocks	Independent front control arms with large adjustable coil-over shocks and a rear swing-arm with large adjustable coil-over shocks
Transmission	Dual commercial Hydro-Gear® ZT-4400™ transaxles with 8.3" cooling fans	Dual 21cc hydro pumps 20.6 cu in wheel motors with external oil cooler
Drive Axles (in)	1.375	1.25 tapered
Caster Tires (in)	13 x 6.5 - 6	13 x 6.5 - 6
Drive Tires (in)	24 x 12 - 12	26 x 12 - 12
SPEED		
Speeds-Fwd (mph)	0 - 10	0 - 12
Speeds-Rev (mph)	0 - 6	0 - 6
DIMENSIONS		
Overall Length (in)	86.25	89.66
Overall Width (in) Deflector Down / Up	76.75 / 63.5	86 / 74
Dry Weight (lbs)	1606	2518
OPERATOR SYSTEMS		
Seat Package	Premium high-back with adjustable arm rests	Premium high-back Suspension Seat with adjustable arm rest, adjustable lumbar and back recline
ROPS	180° foldable	105° foldable
Instrumentation	Dual-function hour meter, fuel level gauge in each tank	Digital display
Controls / Safety Group	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls	
Parking Brake / Safety Circuit	Hand operated internal transaxle brake	Hand-operated external drum type
WARRANTY		
Engine	2-Year limited manufacturer's warranty †	
Balance of Machine	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years(24 months). Coil-over shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Coverage on other components varies, please see operator's manual for complete details.†	

SPECIFICATIONS

SRS SERIES

► Indicates Model Upgrade/Increase

	SRS Z1				SRS Z2				SRS Z3X			
Part #:	5901939	5901941	5901940	5901942	5902050	5901947	5901948	5902070	5901955	5902123	5902071	5902096
Engine Brand	Kawasaki® FX600V	Vanguard®	Kawasaki® FX691V	Vanguard®	Kawasaki® FT730V	Kawasaki® FX801V	Vanguard® 810 EFI with Oil Guard™	Vanguard® 810 EFI with Oil Guard™	Kawasaki® FX850V	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™
Power Rating (hp)	19**	23*	22**	23*	24**	25.5**	28*	28*	27**	37*	37*	37*
Displacement (cc)	603	627	726	627	726	852	810	810	852	993	993	993
PTO	Electric				Electric				Electric			
Cylinders	2				2				2			
Starter	Electric				Electric				Electric			
Oil Guard™ System	N/A				N/A				N/A			
Fuel Tank Capacity (gal)	6				8				11			
MOWER DECK												
Cutting Width (in)	36	48			52	60			52	60	72	
Cutting Height (in)	1.75 - 4.5				1.75 - 5				1.75 - 5			
Deck Construction	Fabricated 10-gauge		iCD™ Cutting System		iCD™ Cutting System			iCD™+ Cutting System	iCD™ Cutting System		iCD™+ Cutting System	
Spindles	Aluminum greaseable				Aluminum greaseable			Cast-iron	Cast-iron greaseable			
SUSPENSION & DRIVE TRAIN												
Suspension	Adjustable coil-over shock; Operator Suspension Platform				Adjustable coil-over shock; Operator Suspension Platform				Adjustable coil-over shock; Operator Suspension Platform			
Transmission	Hydro-Gear® ZT-3400® transaxles with 7" cooling fans				Dual commercial Hydro-Gear® ZT-3800™ transaxles with 7" cooling fans and oil coolers				Dual commercial Hydro-Gear® ZT-4400™ transaxles with 8" cooling fans			
Drive Axles (in)	1.125				1.125				1.375			
Drive Tires (in)	23 x 8.5 -12	23 x 10.5 - 12			23 x 10.5 - 12				24 x 9.5 - 12	24 X 12-12		
Caster Tires (in)	11 x 4 - 5, Flat-free				13 x 5 - 6, Flat-free				13 x 6.5 - 6, Flat-free			
SPEED												
Speeds-Fwd (mph)	0 - 8				0 - 10				0 - 12			
Speeds-Rev (mph)	0 - 4				0 - 5				0 - 5			
DIMENSIONS												
Overall Length (in)	65				67		72.75		69	73.75	74.5	
Overall Width (in) Deflector Down / Up	49 / 42	59.5 / 54			65 / 54.75		74 / 65		65 / 54.5	74 / 65	85.25 / 77	
Dry Weight (lbs)	813	866			938		1051		1184	1273	1327	
OPERATOR SYSTEMS												
Seat Package	N/A				N/A				N/A			
ROPS	N/A				N/A				N/A			
Instrumentation	Dual-function hour meter, fuel level gauge											
Safety Group / Controls	Operator presence in platform, parking brake safety circuit for starting engine, automatic PTO restart											
Parking Brake	Hand-operated internal transaxle brake											
WARRANTY												
Engine	3-Year limited manufacturer's warranty †											
Balance of Machine	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Transaxles are covered for 3 years (36 months). Coverage on other components varies, please see operator's manual for complete details.†											

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.
** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.
† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

SPECIFICATIONS

PROCUT SERIES

ProCut™ S		
Part #:	5900533 w/ 5900632	5902106 w/ 5900632
Engine Brand	Kawasaki® FS730V	Briggs & Stratton® CXi Series
Power Rating (hp)	24**	27*
Displacement (cc)	726	810
PTO	Electric	
Cylinders	2	
Starter	Electric	
Fuel Tank Capacity (gal)	5.5	
MOWER DECK		
Cutting Width (in)	61	
Cutting Height (in)	1.5 - 5	
Spindles	Aluminum greaseable	
Deck Construction	Fabricated 10-gauge	
SUSPENSION & DRIVE TRAIN		
Suspension	Rear wheel with adjustable coil-over shock	
Transmission	Hydro pump and wheel motors with 7" cooling fans	
Drive Axles (in)	1.25	
Caster Tires (in)	18 x 7.5 (steering); 11 x 4 (front)	
Drive Tires (in)	22 x 10 - 10	
SPEED		
Speeds-Fwd (mph)	0 - 8	
Speeds-Rev (mph)	0 - 4	
DIMENSIONS		
Overall Length (in)	115	
Overall Width (in) Deflector Down / Up	73 / 61.5	
Dry Weight (lbs)	1100	
OPERATOR SYSTEMS		
Seat Package	Premium mid-back seat with adjustable arm rests	
Instrumentation	Hour meter	
ROPS	N/A	
Controls / Safety Group	Single foot pedal speed control, foot-actuated operator presence, blade/clutch safety switch/yoke steering control	
Parking Brake / Safety Circuit	Drum	
WARRANTY		
Engine	3-Year limited manufacturer's warranty †	
Balance of Machine	4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Coil-over shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Coverage on other components varies, please see operator's manual for complete details. †	

E SERIES

300e		
Part #:	5902093	5902094
Battery	Vanguard™ / (1) 48V 3.5 kWh	
Charge Time	3.5 Hours	
Run Time	Up to 2 Hours	
Charger	Onboard / Standard Outdoor Cord, 110V Outlet (Type B)	
MOWER DECK		
Cutting Width (in)	42	48
Cutting Height (in)	1.5 - 4.5	
Deck Construction	10-Gauge Steel, Fabricated	
SUSPENSION & DRIVE TRAIN		
Suspension	Front and rear adjustable coil-over shock	
Caster Tires (in)	11 x 6 - 5	
Drive Tires (in)	20 x 8 - 8	20 x 10 - 8
SPEED		
Speeds-Fwd (mph)	0 - 7	
DIMENSIONS		
Overall Length (in)	70	70
Overall Width (in) Deflector Down / Up	55 / 45	60 / 50
Dry Weight (lbs)	651	682
OPERATOR SYSTEMS		
Seat Package	18" Cut & Sew w/ Armrests	
Instrumentation	5" LED Touchscreen	
ROPS	N/A	
Controls Group	Touchscreen speed control, foot-actuated operator presence, parking brake safety circuit, adjustable twin steering controls	
Parking Brake / Safety Circuit	Foot-operated external transaxle brake	
WARRANTY*		
Battery	3-Year (36 months) consumer warranty, 90-Day commercial warranty	
Equipment	3-Year (36 months) consumer warranty, 90-Day commercial warranty	

* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† See operator's manual or dealer for complete warranty details. Refer to engine operator's manual for engine warranty.

^ Adjusted Discharge Megawatt-hours is calculated by adding the total cumulative megawatt-hours discharge of the battery with two time the total cumulative megawatt-hours of discharge of the battery while in the "alarm" state (both values as reported by the battery)

SPECIFICATIONS

FW SERIES

► Indicates Model Upgrade/Increase

FW15		FW25			FW45					
Part #:	5901737	5901886	5901887	5901888	5902014	5901891	5902015	5901892	5901893	5902016
Engine Brand	Honda® GXV390	Kawasaki® FS600V	Kawasaki® FS600V	Kawasaki® FS600V	Kawasaki® FX651V	Kawasaki® FX651V	Kawasaki® FX651V	Vanguard® 810 EFI with Oil Guard™	Vanguard® 810 EFI with Oil Guard™	Kawasaki® FX730V
Power Rating (hp)	10.2*	18.5**	18.5**	18.5**	20.5**	20.5**	20.5**	28*	28*	23.5**
Displacement (cc)	389	603	603	603	726	726	726	810		726
PTO	Manual, cable	Electric			Electric					
Cylinders	1	2			2					
Starter	Manual	Electric			Electric					
Oil Guard™	N/A	N/A			N/A		Standard			N/A
Fuel Tank Capacity (gal)	0.55	5			5					
MOWER DECK										
Cutting Width (in)	32	36	48		48	52				61
Cutting Height (in)	1.5 - 5	1.5 - 4.5			1.5 - 5					
Deck Construction	Fabricated 14 and 12-gauge	Fabricated 10-gauge			Fabricated 10-gauge					
Spindles	Aluminum greaseable	Aluminum greaseable			Cast-iron greaseable					
SUSPENSION & DRIVE TRAIN										
Transmission	Peerless axle with differential chain driven by Hydro-Gear® RT-310™ pump and motor	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" mounted cooling fans			Dual commercial Hydro-Gear® ZT-3400® transaxles with 7" cooling fans with oil coolers					
Drive Axles (in)	0.75	1			1					
Drive Tires (in)	13 x 5 - 6	20 x 7 - 10			20 x 7 - 10	20 x 8 - 10				
Caster Tires (in)	10.5 x 3 Caster wheel	9 x 3.5 - 4 Flat-free			11 x 4 - 5 Flat-free					
SPEED										
Speeds-Fwd (mph)	0 - 4	0 - 6			0 - 7					
Speeds-Rev (mph)	0 - 2	0 - 3			0 - 3					
DIMENSIONS										
Overall Length (in)	73.5	Standard: 78, CC™: 73			CC™: 75"	Standard: 78.75"	CC™: 75"	Standard: 78.75"	CC™: 75"	CC™: 75"
Overall Width (in) Deflector Down / Up	44 / 32.5	48.5 / 40.75	59.75 / 52.5		62.5 / 49.5	67 / 57				76.5 / 65
Dry Weight (lbs)	285	632	694		809	814				888
OPERATOR SYSTEMS										
Instrumentation	Speed indicator	Dual-function hour meter			Dual-function hour meter, speed indicator					
Safety Group / Controls	Blade control bail OPC	CC™ (Centralized Controls); Operator presence, centralized foot activated neutral pedals, neutral start safety circuit	Standard Controls; Operator presence, centralized foot activated neutral pedals, neutral start safety circuit	CC™ (Centralized Controls); Operator presence, centralized foot activated neutral pedals, neutral start safety circuit	CC™ (Centralized Controls); Operator presence, centralized foot activated neutral pedals, neutral start safety circuit	Standard Controls; Operator presence, centralized foot activated neutral pedals, neutral start safety circuit	CC™ (Centralized Controls); Operator presence, centralized foot activated neutral pedals, neutral start safety circuit	Standard Controls; Operator presence, centralized foot activated neutral pedals, neutral start safety circuit	CC™ (Centralized Controls); Operator presence, centralized foot activated neutral pedals, neutral start safety circuit	
Parking Break	—	Hand-operated internal transaxle brake			Hand-operated internal transaxle brake					
WARRANTY										
Engine	3-Year limited manufacturer's warranty¹									
Balance of Machine	2-Year limited warranty commercial use, front-to-rear, parts & labor. Coverage on other components varies, please see operator's manual for complete details.¹									

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

^ Power rated by engine manufacturer.

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

SPECIFICATIONS

FB SERIES

	FB1000	FB2000	FB3000
Part #:	5902012	5902132	5902135
Engine Brand	Vanguard® V-Twin	Vanguard® V-Twin	Vanguard® V-Twin
Power Rating (hp)	18*	23*	35*
Displacement (cc)	570	627	993
RPM	3300	3200	2600
FUEL SYSTEM			
Fuel Tank Capacity (gal)	5	10 w/ fuel gauge	10 w/ fuel gauge
Fuel Type	Regular, unleaded gasoline	Regular, unleaded gasoline	Regular, unleaded gasoline
TRANSMISSION			
Drive Train Type	Dual hydrostatic	Dual hydrostatic	Dual hydrostatic
Transaxles	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" cooling fans	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" cooling fans	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" cooling fans
Number of Speeds	Infinitely variable	Infinitely variable	Infinitely variable
Max. Travel Speed	8 mph	8 mph	9 mph
TIRES & WHEELS			
Front Tires	11 X 4 - 5, Flat-Free	11 x 4 - 5, Flat-Free	13 x 5.5 - 6, Flat-Free
Rear Tires	20 x 8 - 8	20 x 8 - 8	22 x 11 - 10
BLOWING			
Air Flow	3500 cubic feet per minute	4500 cubic feet per minute	7500 cubic feet per minute
Air Speed	150+ mph	165+ mph	165+ mph
DIMENSIONS			
Overall Length (in)	59	60	65
Overall Width (in)	35.5	42	45
Overall Height (in)	47	54	56
Dry Weight (lbs)	664	749	895
ELECTRICAL SYSTEM			
Charging System	16 amp	16 amp	20 amp
Ignition	Flywheel magneto	Flywheel magneto	Flywheel magneto
Starter	Solenoid shift	Solenoid shift	Solenoid shift
Fuse	20 amp blade	30 amp blade	30 amp blade
WARRANTY†			
Warranty (Engine)	3-Year limited manufacturer's warranty		
Warranty (Balance of Machine)	Standard: 2 years; Rental: 1 year		

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

SPECIFICATIONS

FS SERIES (SPREADERS)

Rover™ XC FS1200	
Model #	5902000
Model	Vanguard® 160
Power Rating (hp)	5*
Displacement (cc)	169
RPM	Full speed: 3750 rpm (no load) Idle: 1400 rpm
Clutch	2:1 gear reduction wet clutch
FUEL SYSTEM	
Capacity	0.82 gal. (3.1 L)
Fuel Type	Regular unleaded gasoline, 87 octane or higher
Fuel Shut-Off Valves	Located on engine
TRANSMISSION	
Model	Peerless 855 Series coated for corrosion resistance
Gear Selections	2 forward, 1 reverse, neutral
Speed	Low gear: 3.5 mph (5.6 km/hr) High gear: 5 mph (8 km/hr)
TIRES & WHEELS	
Front Tires	18" x 9.5 - 8, RV antifreeze added for ballast and traction
Rear Tires	13" x 6.5 - 6
SPREADER	
Model	Spyker 220 Series
Capacity	200 lbs.
Spread Width	14' (consistent)
DIMENSIONS	
Overall Length	54" (137 cm)
Overall Width	35.5" (90 cm)
Overall Height	49" (124 cm)
Weight	Dry: 330 lbs. (150 kg), Full: 550 lbs. (249 kg)
ELECTRICAL SYSTEM	
Charging System	N/A
Charging Capacity	N/A
Safety Interlock	This machine is equipped with a neutral safety start module. To start the engine, the transmission must be in the neutral (N) position.
WARRANTY†	
Spreader	Standard warranty period: 1 year (12 months); Rental warranty period: 90 days
Belts, Tires, Brake Pads, Hoses, Battery	Standard warranty period: 90 days; Rental warranty period: 90 days
Accessories	Standard warranty period: 1 year (12 months); Rental warranty period: 90 days
Engine	See Engine Operator's Manual‡

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

^ Power rated by engine manufacturer..

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

FS SERIES (SPREADER/SPRAYERS)

Pathfinder™ FS2100		Pathfinder™ XC FS2200	
Model #	5901752	5901753	
Model	Honda® GX200-URH2	Honda® GX200-URH2	
Power Rating (hp)	5.8*	5.8*	
Displacement (cc)	196	196	
RPM	Full speed: 3750 rpm (no load), Idle: 1400 rpm	Full speed: 3750 rpm (no load), Idle: 1400 rpm	
Clutch	2:1 gear reduction wet clutch	2:1 gear reduction wet clutch	
FUEL SYSTEM			
Capacity	2.5 gal. (9.5 L)	2.5 gal. (9.5 L)	
Fuel Type	Regular unleaded gasoline, 87 octane or higher	Regular unleaded gasoline, 87 octane or higher	
Fuel Shut-Off Valves	Located on engine and below tank	Located on engine and below tank	
TRANSMISSION			
Model	Peerless 855 Series coated for corrosion resistance	Peerless 855 Series coated for corrosion resistance	
Gear Selections	2 forward, 1 reverse, neutral	2 forward, 1 reverse, neutral	
Speed	Low gear: 3.5 mph (5.6 km/hr), High gear: 5 mph (8 km/hr)	Low gear: 3.5 mph (5.6 km/hr), High gear: 5 mph (8 km/hr)	
TIRES & WHEELS			
Front Tires	18" x 9.5 - 8, RV antifreeze added for ballast and traction	18" x 9.5 - 8, RV antifreeze added for ballast and traction	
Rear Tires	13" x 6.5 - 6	13" x 6.5 - 6	
SPREADER			
Model	Spyker 120 Series	Spyker 220 Series	
Capacity	100 lbs.	200 lbs.	
Electric Spreader Motor	N/A	N/A	
Spread Width	14' (consistent)	14' (consistent)	
SPRAYING SYSTEM			
Spray Pump	2 gpm mechanically driven diaphragm pump	2 gpm mechanically driven diaphragm pump	
Tank Capacity	12 gal. (45.4 L)	16 gal. (60.6 L)	
Nozzles	Broadcast: Turbo FloodJet® TF-VS5, Trim: Turbo TeeJet® TT11004VP	Broadcast: Turbo FloodJet® TF-VS5, Trim: Turbo TeeJet® TT11004VP	
Spray Widths	3' or 11'	3' or 11'	
Spray Pressure	Variable gauge between 0-60 psi	Variable gauge between 0-60 psi	
Spray Rate	1/4 gallon per thousand square feet	1/4 gallon per thousand square feet	
Production (sq. ft. per fill)	48,000 (1/4 gallon per 1,000 ft² at 25 psi at 5 mph)	64,000 (1/4 gallon per 1,000 ft² at 25 psi at 5 mph)	
DIMENSIONS			
Overall Length	54" (137 cm)	58" (147 cm)	
Overall Width	35.5" (90 cm)	35.5" (90 cm)	
Overall Height	49" (124 cm)	49" (124 cm)	
Weight	Dry: 420 lbs. (190 kg), Full: 640 lbs. (290 kg)	Dry: 450 lbs. (204 kg), Full: 670 lbs. (304 kg)	
ELECTRICAL SYSTEM			
Charging System	N/A	N/A	
Charging Capacity (min / max)	N/A	N/A	
Safety Interlock	This machine is equipped with a neutral safety start module. To start the engine, the transmission must be in the neutral (N) position.		
WARRANTY†			
Spreader/Sprayer	Standard warranty period: 1 year (12 months); rental warranty period: 90 days		
Belts	Standard warranty period: 90 days; rental warranty period: 90 days		
Tires, Brake Pads, Hoses, Battery	Standard warranty period: 90 days; rental warranty period: 90 days		
Accessories	Standard warranty period: 1 year (12 months); rental warranty period: 90 days		
Engine	See engine operator's manual‡		

SPECIFICATIONS

FS SERIES (SPREADER/SPRAYERS)

Venture™ FS3100		Venture™ XC FS3200	
Model #	5901754	5901755	
Model	Vanguard® V-Twin engine	Vanguard® V-Twin engine	
Power Rating (hp)	18*	18*	
Displacement (cc)	570	570	
RPM	3600 rpm	3600 rpm	
Clutch	N/A	N/A	
FUEL SYSTEM			
Capacity	2.5 gal. (9.5 L)	2.5 gal. (9.5 L)	
Fuel Type	Regular unleaded gasoline, 87 octane or higher	Regular unleaded gasoline, 87 octane or higher	
Fuel Shut-Off Valves	N/A	N/A	
TRANSMISSION			
Model	Hydro-Gear® ZT-3100®	Hydro-Gear® ZT-3100®	
Gear Selections	N/A	N/A	
Speed	8 mph	8 mph	
TIRES & WHEELS			
Front Tires	13" x 6.5 - 6	13" x 6.5 - 6	
Rear Tires	20" x 8 - 10	20" x 10 - 12	
SPREADER			
Model	Spyker 120 Series	Spyker 220 Series	
Capacity	100 lbs.	200 lbs.	
Electric Spreader Motor	Standard	Standard	
Spread Width	3' to 25' (variable)	3' to 25' (variable)	
SPRAYING SYSTEM			
Spray Pump	5 gpm electric diaphragm pump	5 gpm electric diaphragm pump	
Tank Capacity	24 gal. (90.8 L)	24 gal. (90.8 L)	
Nozzles	4 - AIXR110025	4 - AIXR110025	
Spray Widths	2', 4', 6' or 8'	2', 4', 6' or 8'	
Spray Pressure	Variable gauge between 0-60 psi	Variable gauge between 0-60 psi	
Spray Rate	1/4 gallon per thousand square feet	1/4 gallon per thousand square feet	
Production (sq. ft. per fill)	96,000 (1/4 gallon per 1,000 ft² at 20 psi at 5 mph)	96,000 (1/4 gallon per 1,000 ft² at 20 psi at 5 mph)	
DIMENSIONS			
Overall Length	65" (165.1 cm)	65" (165.1 cm)	
Overall Width	36" (91.4 cm)	39" (99.1 cm)	
Overall Height	48" (121.9 cm)	48" (121.9 cm)	
Weight	Dry: 617 lbs. (279.8 kg), Full: 929 lbs. (421.4 kg)	Dry: 627 lbs. (284.4 kg), Full: 939 lbs. (425.9 kg)	
ELECTRICAL SYSTEM			
Charging System	Standard	Standard	
Charging Capacity (min / max)	20 amp / 50 amp	20 amp / 50 amp	
Safety Interlock	Parking brake must be engaged to start engine	Parking brake must be engaged to start engine	
WARRANTY†			
Spreader/Sprayer	Standard warranty period: 1 year (12 months); rental warranty period: 90 days		
Belts	Standard warranty period: 90 days; rental warranty period: 90 days		
Tires, Brake Pads, Hoses, Battery	Standard warranty period: 90 days; rental warranty period: 90 days		
Accessories	Standard warranty period: 1 year (12 months); rental warranty period: 90 days		
Engine	See engine operator's manual‡		

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.



FERRISMOWERS.COM

 **@FERRISMOWERS**

 **@FERRISCOMMERCIALMOWERS**

 **@FERRISMOWERS**

 **MOWWITHFERRIS**

 **@FERRISCOMMERCIALMOWERS**

 **FERRIS-COMMERCIAL-MOWERS**

Briggs & Stratton: All power levels are stated gross horsepower at 3600 rpm per SAE J1940.

Kawasaki: Only Kawasaki Critical Power engines listed in this brochure have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, horsepower-rated in accordance with SAE J2723, and certified by SAE International. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

Yanmar: Power rated by engine manufacturer.

Honda: Power rated by engine manufacturer.

CAT: Power is rated for 48 gross horsepower at 2800 rpm as rated by CAT.

Hydro-Gear® is a registered trademark of Hydro-Gear Limited Partnership.

Kawasaki® is a registered trademark of Kawasaki Motors Corporation.

Yanmar™ is a trademark of Yanmar.

Honda® is a registered trademark of Honda Motor Company, Ltd.

CAT® is a registered trademark of Caterpillar Inc.

Not all models available in California.

Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice. Products may vary from images shown.

BRIGGS & STRATTON

Milwaukee, WI 53201-0702 USA

(414) 259-5333

Copyright ©2024. All rights reserved.